


- 160 W continuous program power capacity
- 1.4" horn throat diameter
- 65 mm (2.5 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 18000 Hz response
- 108.5 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE680TN is the latest version of our premium 65 mm (2.5 in) voice coil, neodymium high frequency driver. The diaphragm in this model has been completely redesigned to incorporate a bent edge voice coil former, as well as new dome and surround geometry. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.

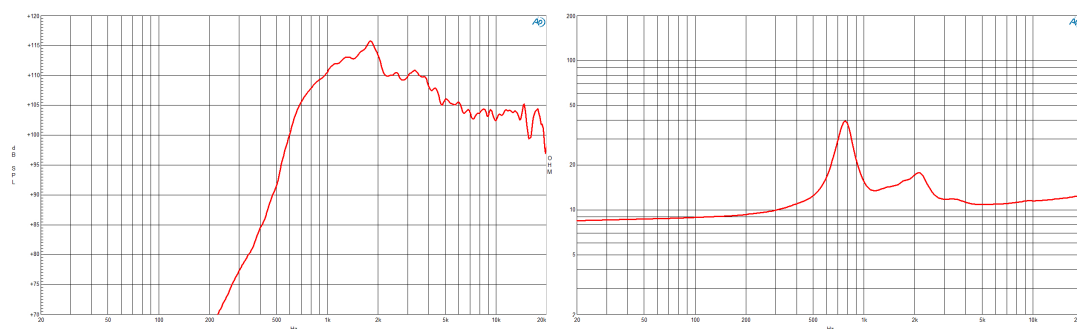

SPECIFICATIONS

Driver mounted on B&C ME90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	16 Ω
Minimum Impedance	11.2 Ω
Nominal Power Handling	80 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	160 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	108.5 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	65 mm (2.5 in)
Winding Material	Aluminium
Inductance	0.15 mH
Flux Density	1.8 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	115 mm (4.5 in)
Depth	51 mm (2.01 in)
Net Weight	1.75 kg (3.85 lb)
Shipping Units	1 pcs
Shipping Weight	1.79 kg (3.94 lb)
Shipping Box	120x120x65 mm (4.72x4.72x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD25BTN8M
--------------------------	------------