
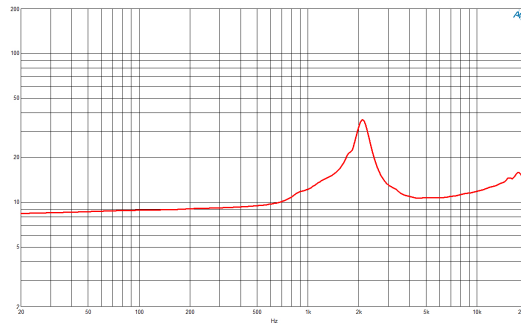


- 50 W continuous program power capacity
- Ultra Compact 60mm diameter
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- HT Polymer diaphragm
- 2000 - 18000 Hz response
- 107 dB sensitivity

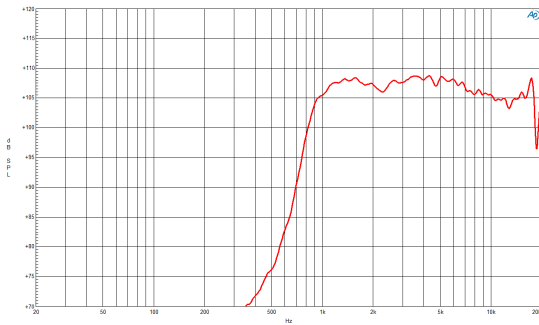

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	16 Ω
Minimum Impedance	10.9 Ω
Nominal Power Handling	25 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	50 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	107 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.
Frequency Range	2 kHz - 18 kHz
Recommended Crossover	2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.8 T
Diaphragm Material	HT Polymer

MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 52 mm (2.05 in) diameter

Overall Diameter	60 mm (2.36 in)
Depth	35 mm (1.38 in)
Net Weight	0.32 kg (0.71 lb)
Shipping Units	1 pcs
Shipping Weight	0.35 kg (0.76 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMDE11016
--------------------------	-----------