
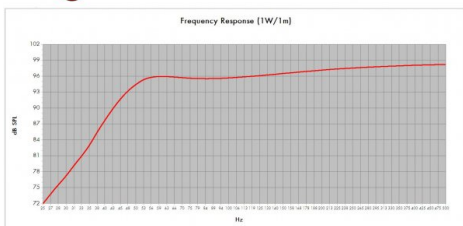
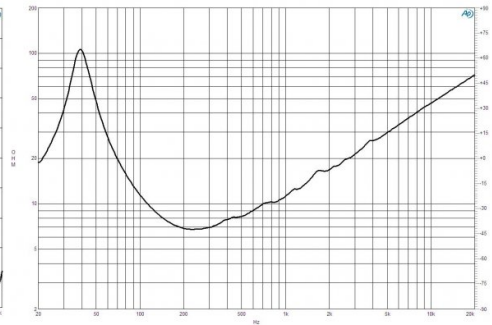


- 1000 W continuous program power capacity
- 76 mm (3 in) copper voice coil
- 40 - 2000 Hz response
- 100 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure
- Double silicone spider and ventilated voice coil gap

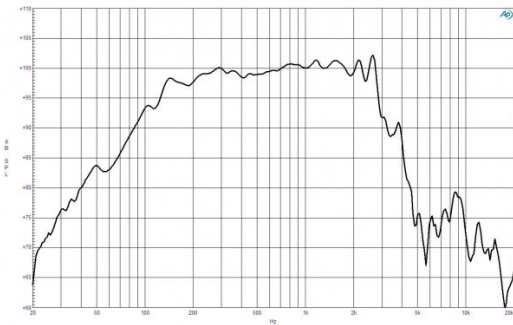

Model:	15FW76		
Enclosure Type:	Box Reflex	Configuration:	One Driver
Internal Net Volume (liters):	80	Q <sub>T</sub> :	7
Tuning Frequency (Hz):	50	Port Area (cm <sup>2</sup> ):	304.0
Frequency (-3 dB) (Hz):	54.0	Port Length (cm):	18.6
Excursion Limited Maximum SPL at 1 meter (dB):	133.7	imped in:	376.7 Ohms (RMS Power Rating)
Thermal Limited Maximum SPL at 1 meter (dB):	133.4	imped in:	300.0 Ohms (RMS Power Rating)

### SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.4 Ω
Nominal Power Handling	500 W 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
Continuous Power Handling	1000 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	100 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	40 Hz - 2000 Hz
Voice Coil Diameter	76 mm (3 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	19 mm (0.75 in)
Magnetic Gap Depth	11 mm (0.43 in)
Flux Density	1.25 T
Woofer Cone Treatment	WP Waterproof Front Side

### PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	40 Hz
Re	5.1 Ω
Qes	0.22
Qms	5.1
Qts	0.21
Vas	138 dm <sup>3</sup> (4.9 ft <sup>3</sup> )
Sd	855 cm <sup>2</sup> (132.5 in <sup>2</sup> )
η0	3.9 %
Xmax	7 mm
Xvar	8 mm
Mms	117 g
Bl	26.2 Tm
Le	1.4 mH
EBP	182 Hz

### DESIGN

Surround Shape	Triple Roll
Cone Shape	Exponential
Magnet Material	Ferrite
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	WP Waterproof Front Side
Recommended Enclosure	80 dm <sup>3</sup> (2.82 ft <sup>3</sup> )
Recommended Tuning	50 Hz

### MOUNTING AND SHIPPING INFO

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (14.7 in)
Baffle Cutout Diameter	354 mm (13.9 in)
Depth	177 mm (6.97 in)
Flange and Gasket Thickness	14 mm (0.55 in)
Air Volume Occupied by Driver	5.5 dm <sup>3</sup> (0.19 ft <sup>3</sup> )
Net Weight	9.3 kg (20.5 lb)
Shipping Units	1 pcs
Shipping Weight	10.6 kg (23.37 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)

### SERVICE KITS

LF recone-kits	RCK15FW768
----------------	------------