

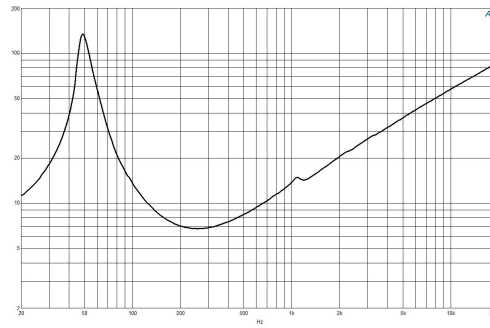


- 600 W continuous program power capacity
- 64 mm (2.5 in) copper voice coil
- 50 - 3000 Hz response
- 92 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure

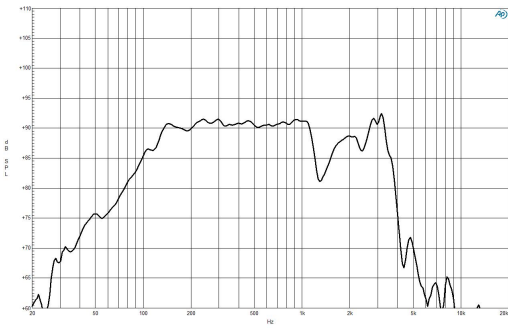

Frequency Response [1W/1m]

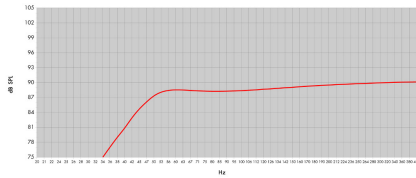

Model:	8FG64	Configuration:	One Driver
Enclosure Type:	Steel Mesh		
Impedance (Nominal):	8 Ω	Q <sub>ES</sub> :	2
Rating Frequency (Hz):	50	Flux Area (cm <sup>2</sup> ):	300
Frequency 10 (dB) (Hz):	35.4	Post Length (mm):	17.3
Frequency 110 (dB) (Hz):	29.8		

## SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.7 Ω
Nominal Power Handling	300 W 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
Continuous Power Handling	600 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	92 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	50 Hz - 3000 Hz
Voice Coil Diameter	64 mm (2.5 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	19 mm (0.75 in)
Magnetic Gap Depth	10 mm (0.39 in)
Flux Density	0.9 T
Woofer Cone Treatment	WP Waterproof Front Side

## PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	51 Hz
Re	5.8 Ω
Qes	0.32
Qms	10.1
Qts	0.31
Vas	15 dm <sup>3</sup> (0.53 ft <sup>3</sup> )
Sd	220 cm <sup>2</sup> (34.1 in <sup>2</sup> )
η0	0.7 %
Xmax	7 mm
Xvar	8 mm
Mms	41 g
Bl	15.8 Tm
Le	1.7 mH
EBP	159 Hz

## DESIGN

Surround Shape	Roll
Cone Shape	Radial
Magnet Material	Ferrite
Spider	Single
Pole Design	T-Pole
Woofer Cone Treatment	WP Waterproof Front Side
Recommended Enclosure	16 dm <sup>3</sup> (0.57 ft <sup>3</sup> )
Recommended Tuning	50 Hz

## MOUNTING AND SHIPPING INFO

Overall Diameter	225 mm (8.86 in)
Bolt Circle Diameter	210 mm (8.3 in)
Baffle Cutout Diameter	187 mm (7.4 in)
Depth	100 mm (3.94 in)
Flange and Gasket Thickness	9 mm (0.37 in)
Air Volume Occupied by Driver	1.5 dm <sup>3</sup> (0.05 ft <sup>3</sup> )
Net Weight	4 kg (8.82 lb)
Shipping Units	1 pcs
Shipping Weight	4.45 kg (9.81 lb)
Shipping Box	255x255x150 mm (10.04x10.04x5.91 in)

## SERVICE KITS

LF recone-kits	RCK008FG648
----------------	-------------