DE7 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME7 horn.

Throat Diameter	**19 mm (0.75 in)**
Nominal Impedance	**16 Ω**
Minimum Impedance	**12 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**10 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**20 W**
Sensitivity Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.	**109 dB**
Frequency Range	**2 kHz - 18 kHz**
Recommended Crossover 12 dB/oct. or higher slope high-pass filter.	**2.5 kHz**
Voice Coil Diameter	**25 mm (1 in)**
Winding Material	**Aluminium**
Inductance	**0.16 mH**
Flux Density	**1.65 T**
Diaphragm Material	**Mylar**

MOUNTING AND SHIPPING INFO

Two M4 holes 180° on 53 mm (2.1 in) diameter

Overall Diameter	**62 mm (2.44 in)**
Depth	**35 mm (1.37 in)**
Net Weight	**0.17 kg (0.37 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.18 kg (0.4 lb)**
Shipping Box	**65x55x40 mm (2.56x2.17x1.57 in)**

SERVICE KITS

HF replacement-diaphragm	**MMDDE716**


- 20 W continuous program power capacity
- 25 mm (1 in) aluminium voice coil
- 3/4" horn throat diameter
- Polyester diaphragm
- 2000 - 18000 Hz response
- 109 dB sensitivity


Available exclusively with 4.8+2.8 mm fast-on terminal tab



B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE7 16 Ω

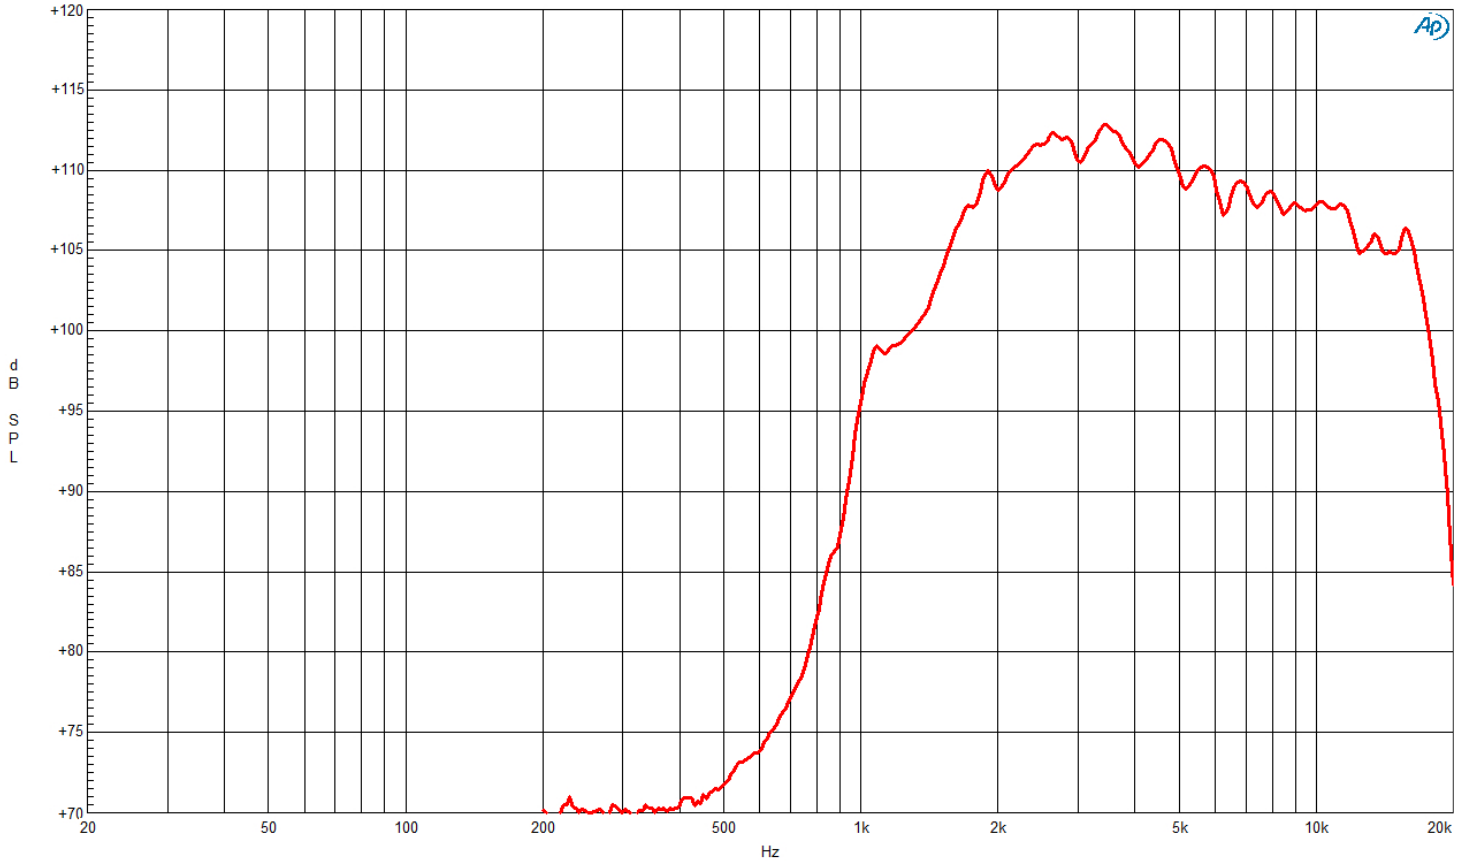

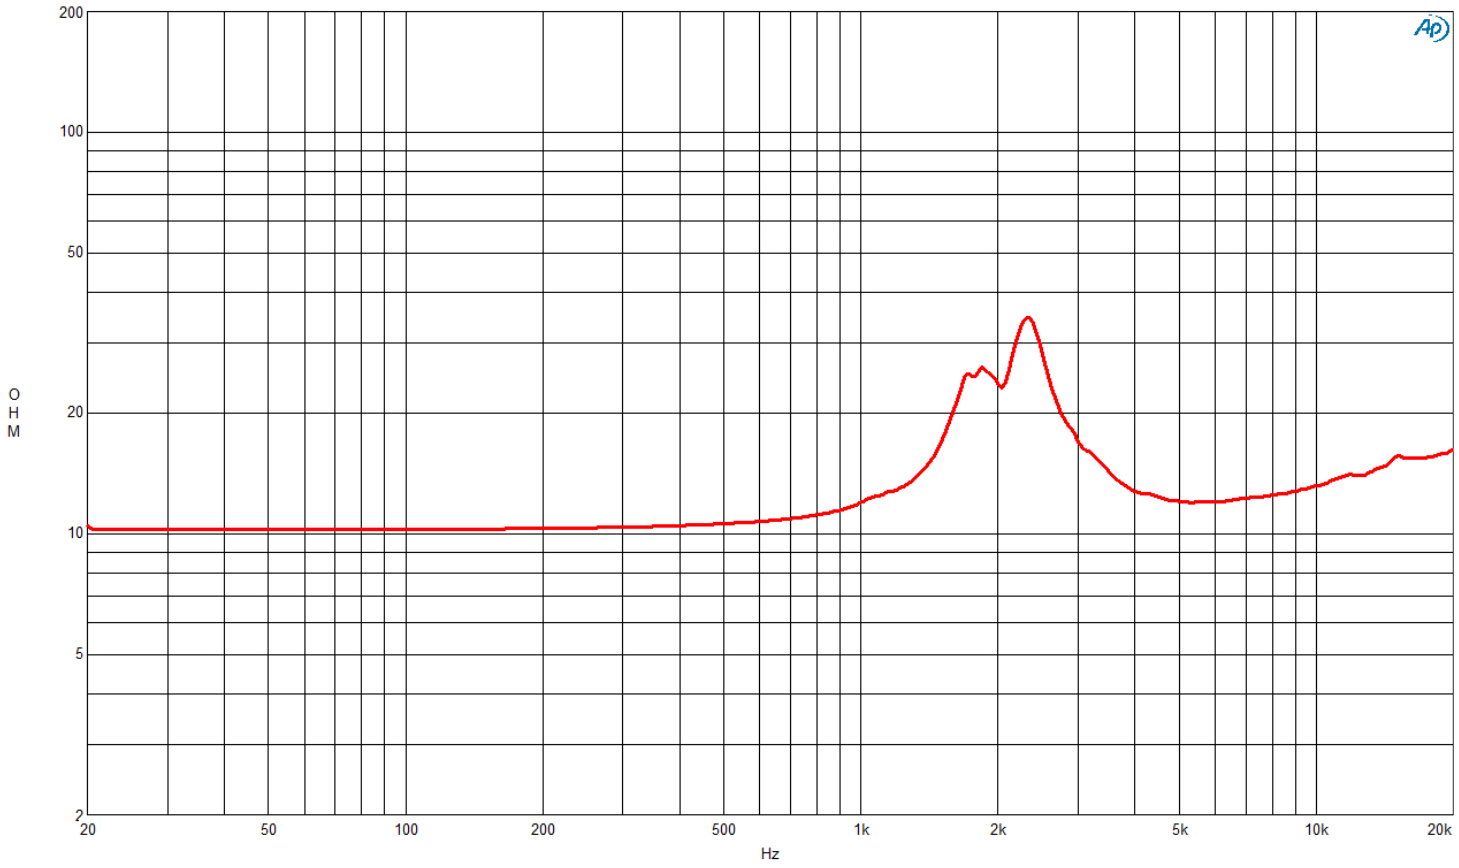

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE7 16 Ω

