

DE120TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	8 Ω
Nominal Power Handling	30 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	60 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	105.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1.2 kHz - 18 kHz
Recommended Crossover	2 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.9 T
Diaphragm Material	Titanium

- 60 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- Titanium diaphragm
- 1200 - 18000 Hz response
- 105.5 dB sensitivity

MOUNTING AND SHIPPING INFO

<p>Three M5 holes 120° on 57 mm (2.2 in) diameter</p><p>Two M5 holes 180° on 57 mm (2.2 in) diameter</p>



Overall Diameter	71 mm (2.8 in)
Depth	34 mm (1.34 in)
Net Weight	0.45 kg (0.98 lb)
Shipping Units	1 pcs
Shipping Weight	0.48 kg (1.05 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMDDE120TN8
--------------------------	--------------------



DE120TN 8 Ω

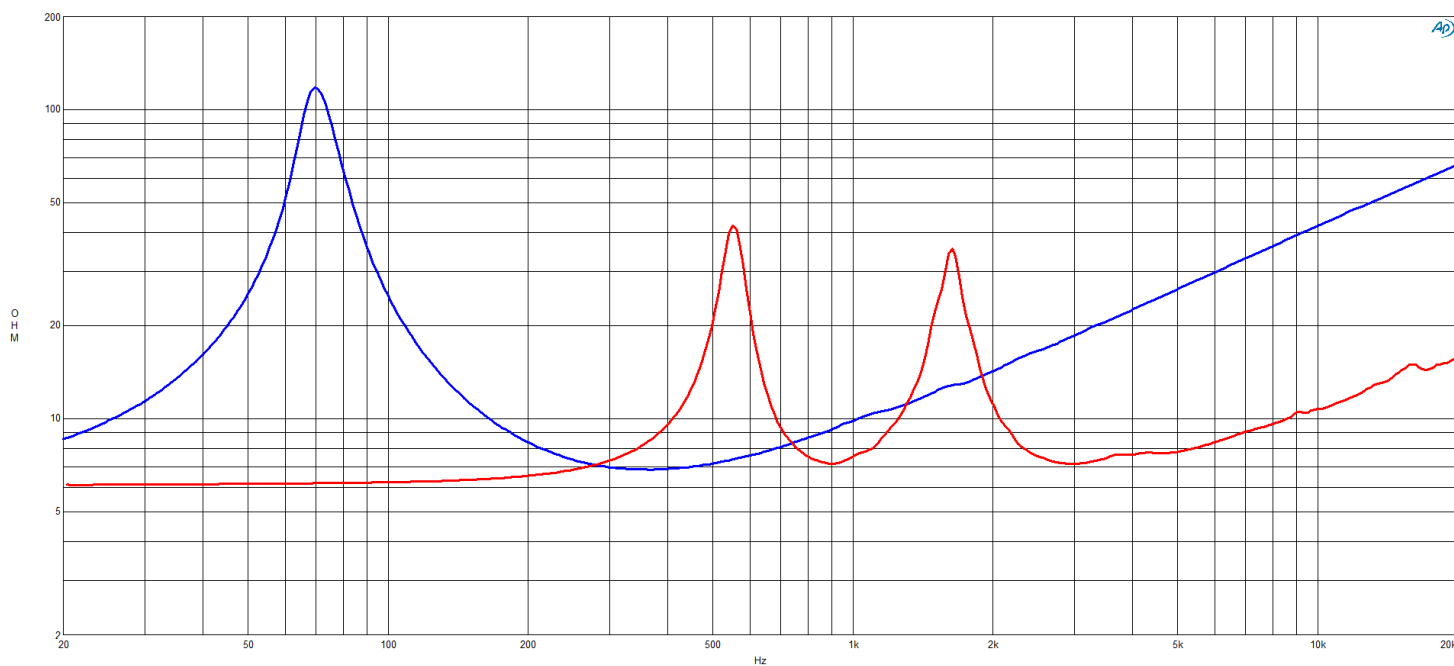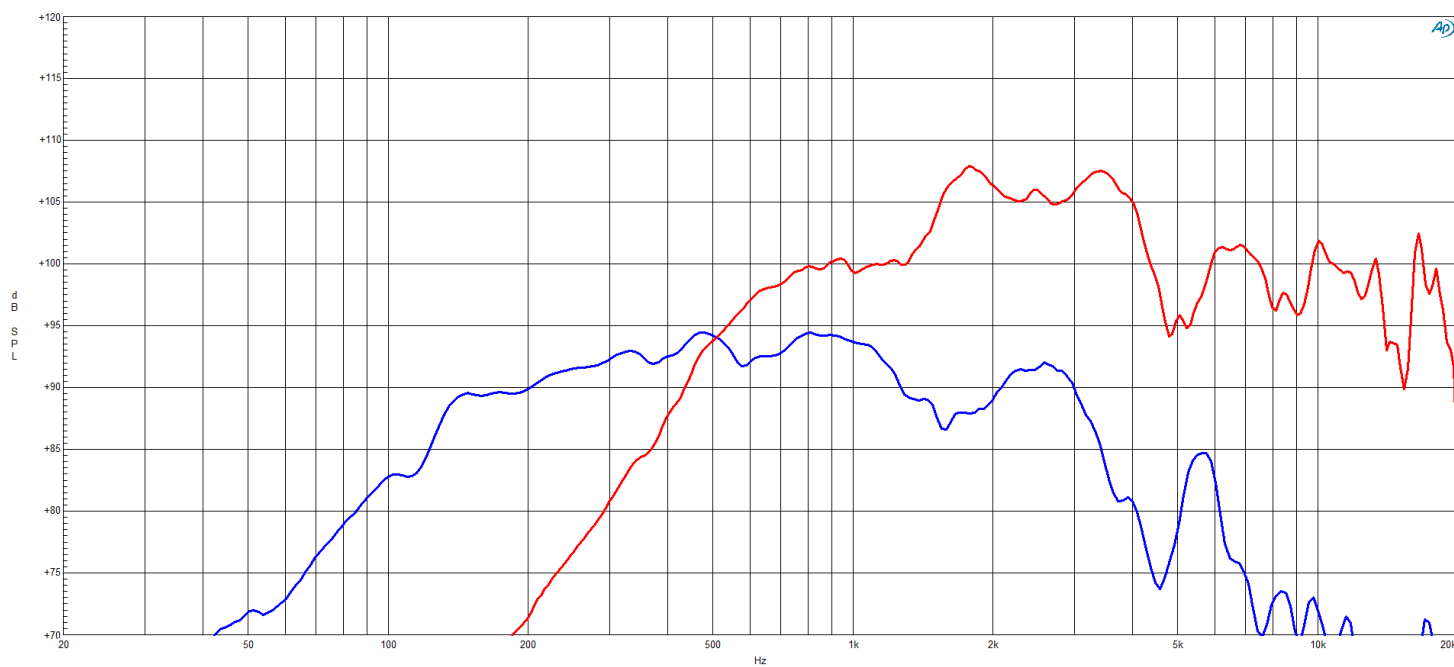

DE120TN 8 Ω

