DE120TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	**25 mm (1 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**8 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**30 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**60 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**105.5 dB**
Frequency Range	**1.2 kHz - 18 kHz**
Recommended Crossover 12 dB/oct. or higher slope high-pass filter.	**2 kHz**
Voice Coil Diameter	**36 mm (1.4 in)**
Winding Material	**Aluminium**
Inductance	**0.14 mH**
Flux Density	**1.9 T**
Diaphragm Material	**Titanium**

MOUNTING AND SHIPPING INFO

Three M5 holes 120° on 57 mm (2.2 in) diameter Two M5 holes 180° on 57 mm (2.2 in) diameter

Overall Diameter	**71 mm (2.8 in)**
Depth	**34 mm (1.34 in)**
Net Weight	**0.45 kg (0.98 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.48 kg (1.05 lb)**
Shipping Box	**105x105x65 mm (4.13x4.13x2.56 in)**

SERVICE KITS

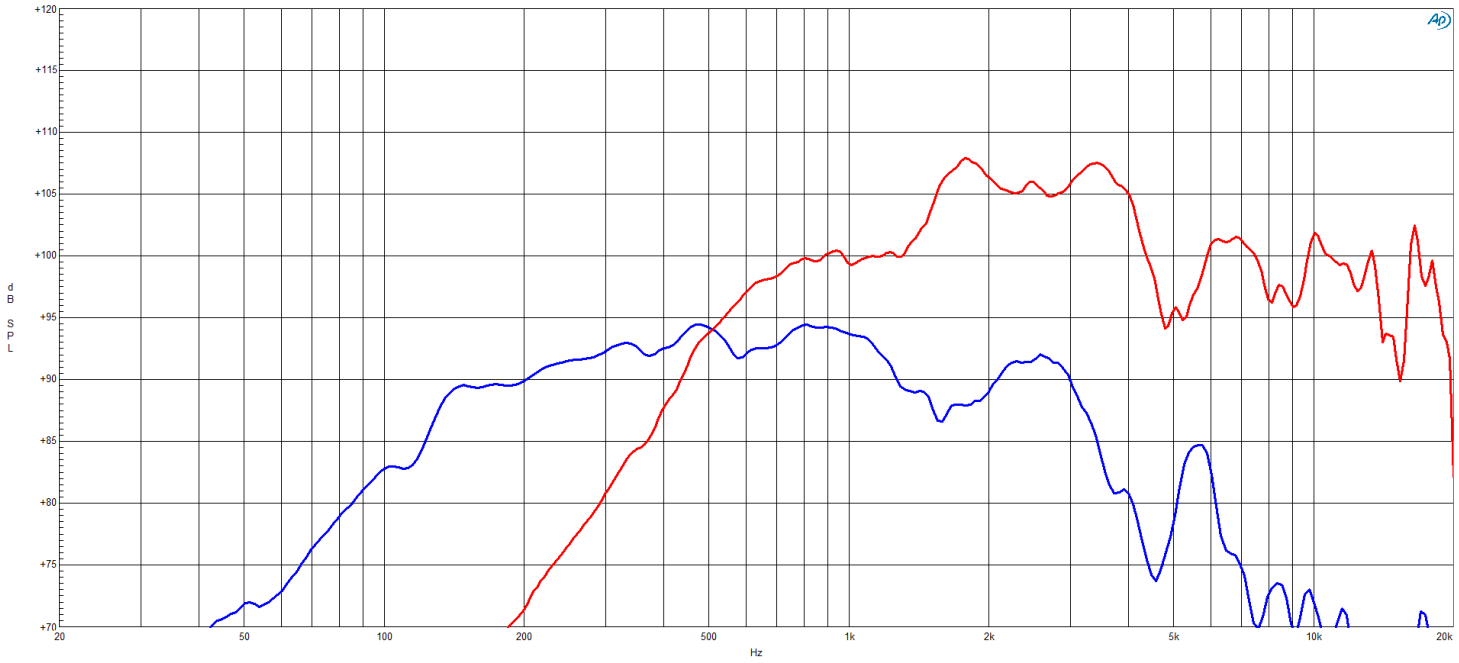
HF replacement-diaphragm	**MMDDE120TN8**

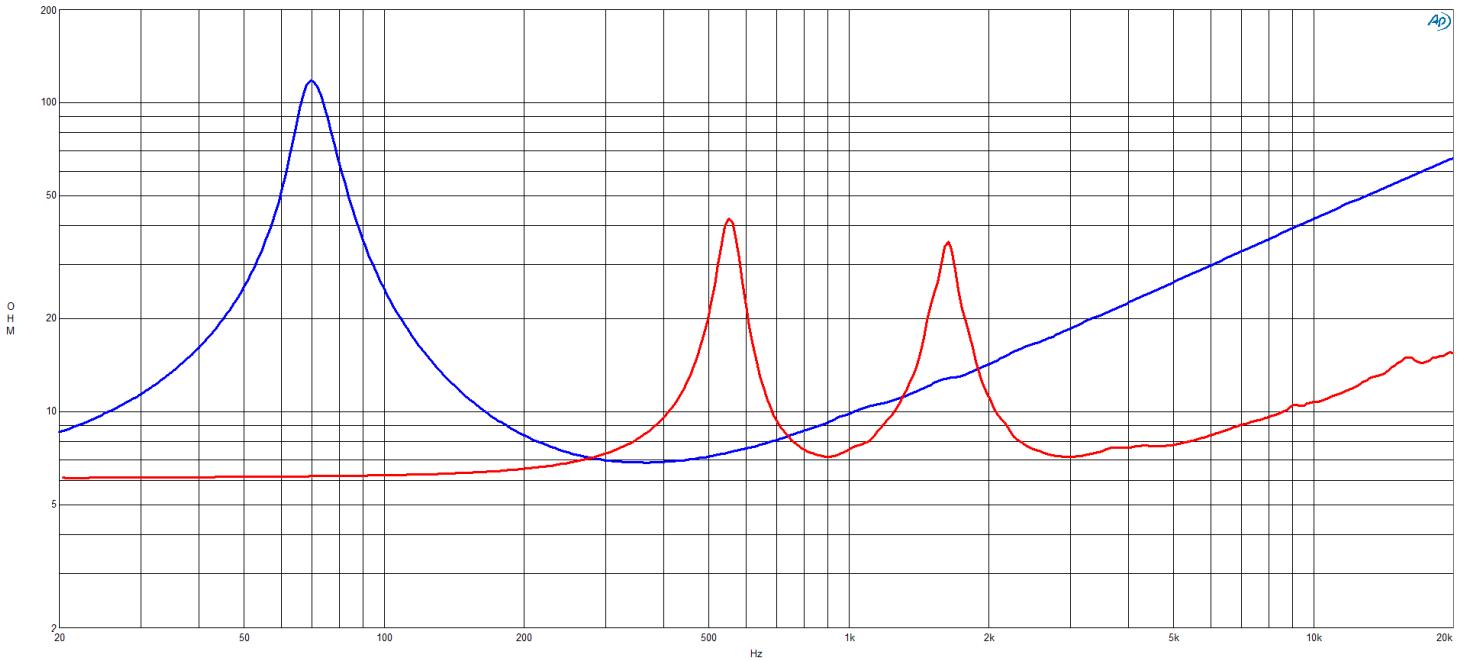
- 60 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- Titanium diaphragm
- 1200 - 18000 Hz response
- 105.5 dB sensitivity



B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE120TN 8 Ω


+120
+115
+110
+105
+100
+95
+90
+85
+80
+75
+70
dB SPL
20
50
100
200
500
1k
2k
5k
10k
20k
Hz


200
100
50
20
10
5
2
OHM
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

DE120TN 8 Ω

