# HF146

## SPECIFICATIONS

| | |
|---|---|
| Nominal Coverage Horizontal | **100 °** |
| Cutoff Frequency | **0.7 kHz** |
| Material | **PC/ABS/GF blend** |
| Design | **Constant Directivity** |
| Dimensions | **260x200x75 mm** |

## MOUNTING AND SHIPPING INFO

| | |
|---|---|
| Net Weight | **0.45 kg (0.99 lb)** |
| Shipping Units | **1 pcs** |
| Shipping Weight | **0.72 kg (1.59 lb)** |
| Shipping Box | **280x270x100 mm** |

- Horn Flare specifically optimized for ME146
- 100° horizontal coverage
- Vertical coverage depends on configuration
- Very good loading and directivity control down to 700 Hz










**B&C Speakers S.p.A.**Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com


# HF146

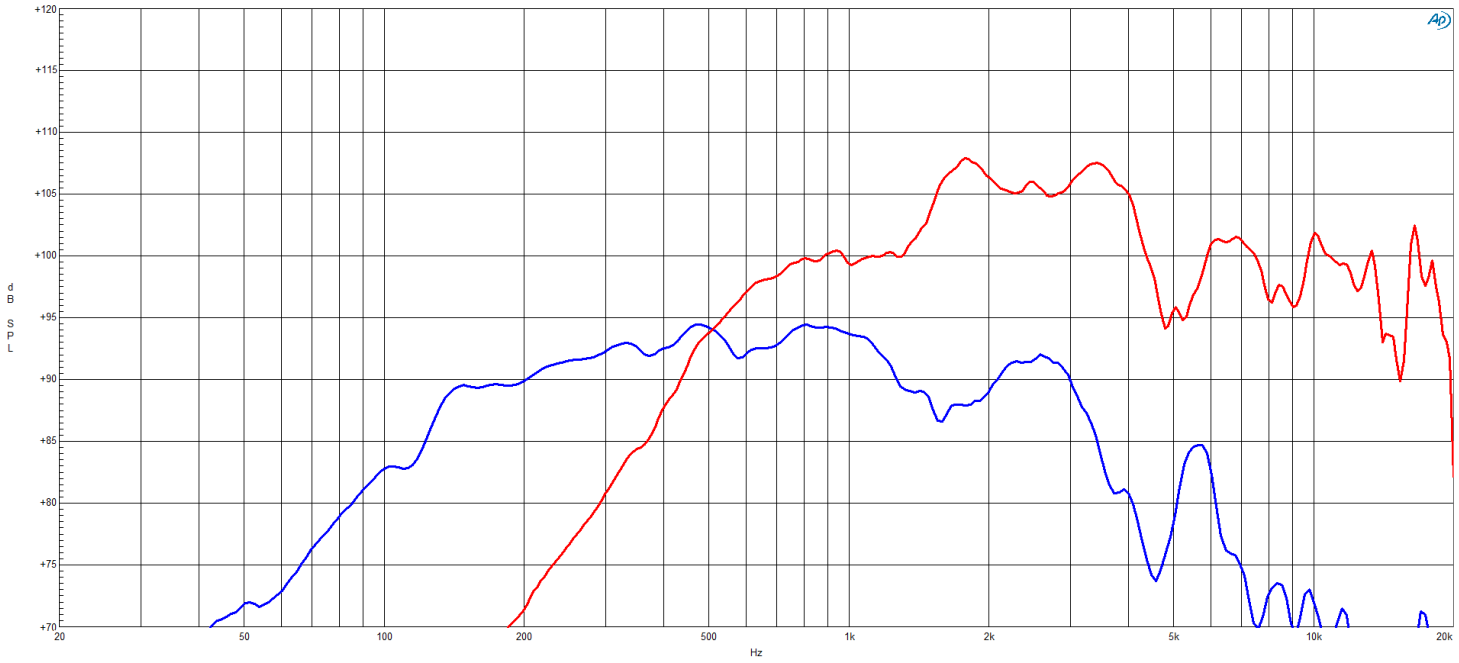
+120
+115
+110
+105
+100
+95
+90
+85
+80
+75
+70
dB SPL
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

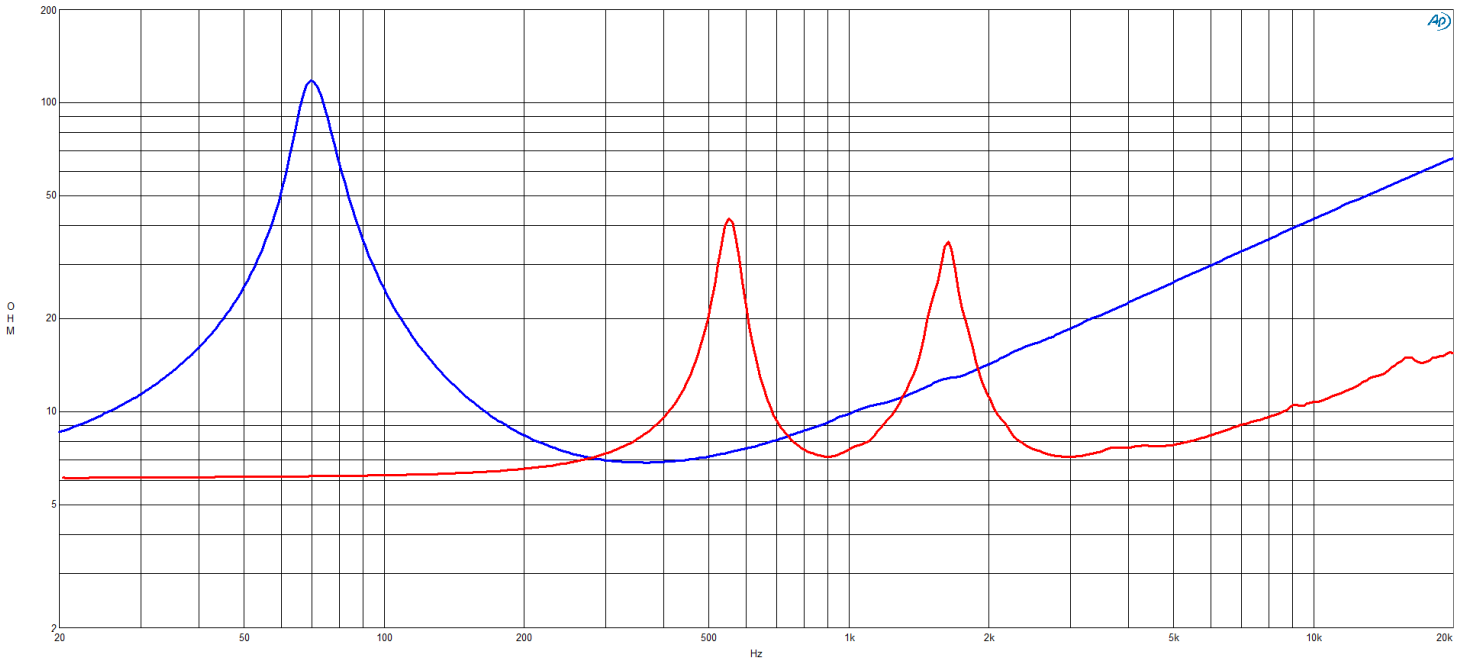
200
100
50
20
10
5
2
OHM
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

# HF146

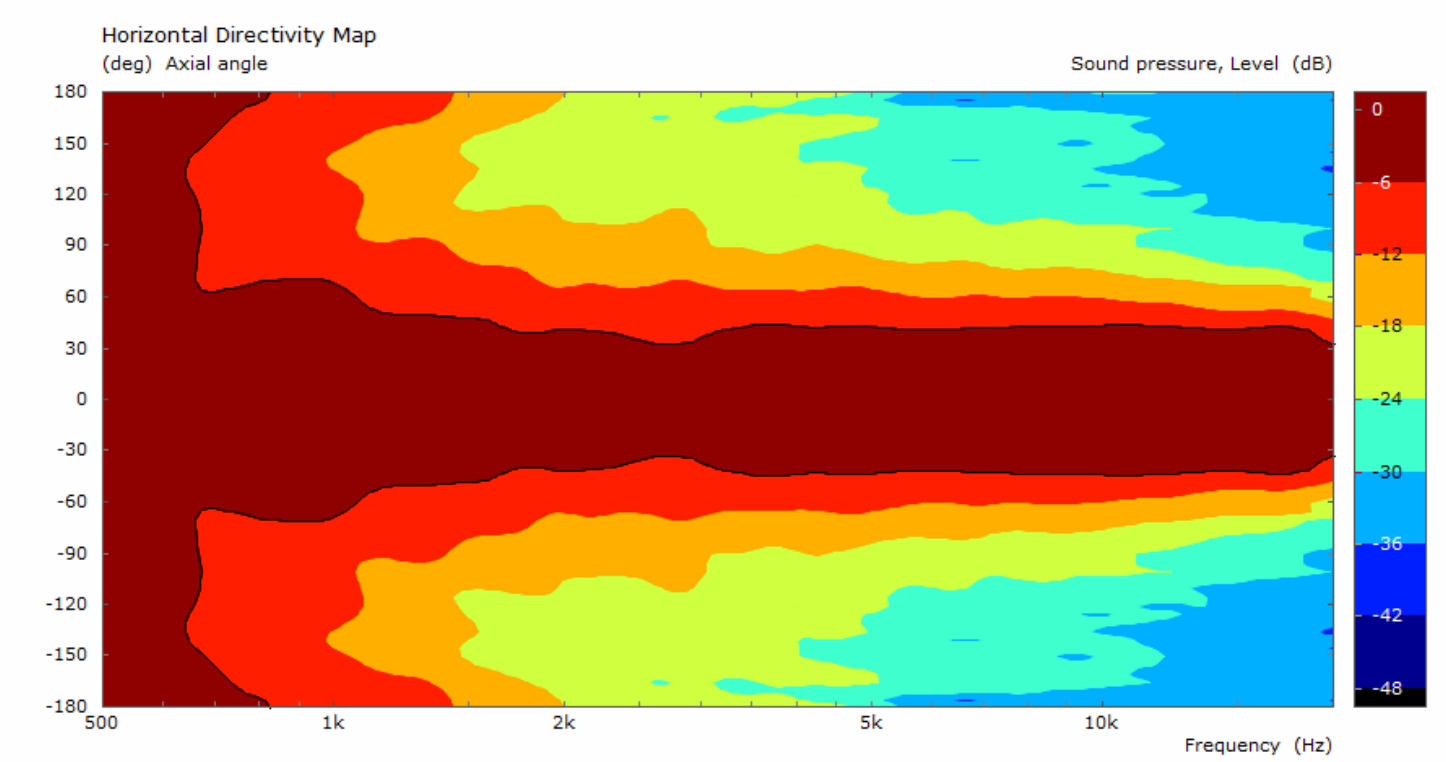

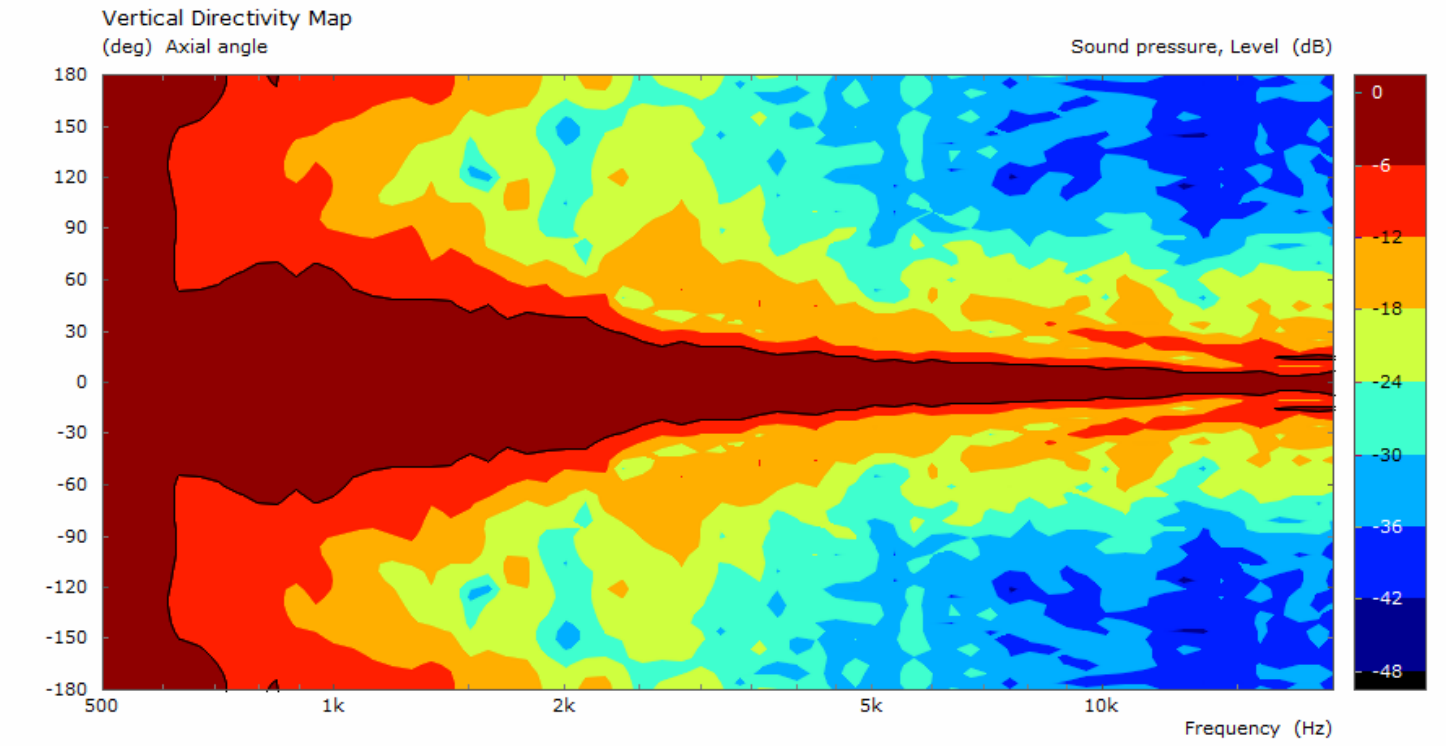

**B&C Speakers S.p.A.** Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

# HF146

