10MD26 8 Ω

Mid-Bass

- 700 W continuous program power capacity
- 76 mm (3 in) aluminium voice coil
- 80 - 4000 Hz response
- 100 dB sensitivity





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

10MD26 8 Ω

Mid-Bass

SPECIFICATIONS

Nominal Diameter	**250 mm (10 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**7.2 Ω**
Nominal Power Handling	**350 W**
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	
Continuous Power Handling	**700 W**
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	**100 dB**
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	**80 Hz - 4000 Hz**
Voice Coil Diameter	**76 mm (3 in)**
Winding Material	**Aluminium**
Former Material	**Glass Fibre**
Winding Depth	**11 mm (0.43 in)**
Magnetic Gap Depth	**8 mm (0.31 in)**
Flux Density	**1.45 T**
Woofer Cone Treatment	**None**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**76 Hz**
Re	**5.8 Ω**
Qes	**0.22**
Qms	**4.8**
Qts	**0.21**
Vas	**20 dm³ (0.71 ft³)**
Sd	**320 cm² (49.1 in²)**
η0	**3.9 %**
Xmax	**1.5 mm**
Xvar	**4.5 mm**
Mms	**31 g**
Bl	**19.6 Tm**
Le	**1.2 mH**
EBP	**345 Hz**

DESIGN

Surround Shape	**Double Roll**
Cone Shape	**Exponential**
Magnet Material	**Ferrite**
Spider	**Single**
Pole Design	**T-Pole**
Woofer Cone Treatment	**None**

MOUNTING AND SHIPPING INFO

Overall Diameter	**262 mm (10.3 in)**
Bolt Circle Diameter	**245 mm (9.6 in)**
Baffle Cutout Diameter	**230 mm (8.8 in)**
Depth	**124 mm (4.9 in)**
Flange and Gasket Thickness	**14 mm (0.55 in)**
Air Volume Occupied by Driver	**2.6 dm³ (0.09 ft³)**
Net Weight	**7.25 kg (15.98 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**7.85 kg (17.31 lb)**
Shipping Box	**295x314x175 mm (11.61x12.36x6.89 in)**


SERVICE KITS


LF recone-kits	**RCK010MD268**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

10MD26 8 Ω

Mid-Bass

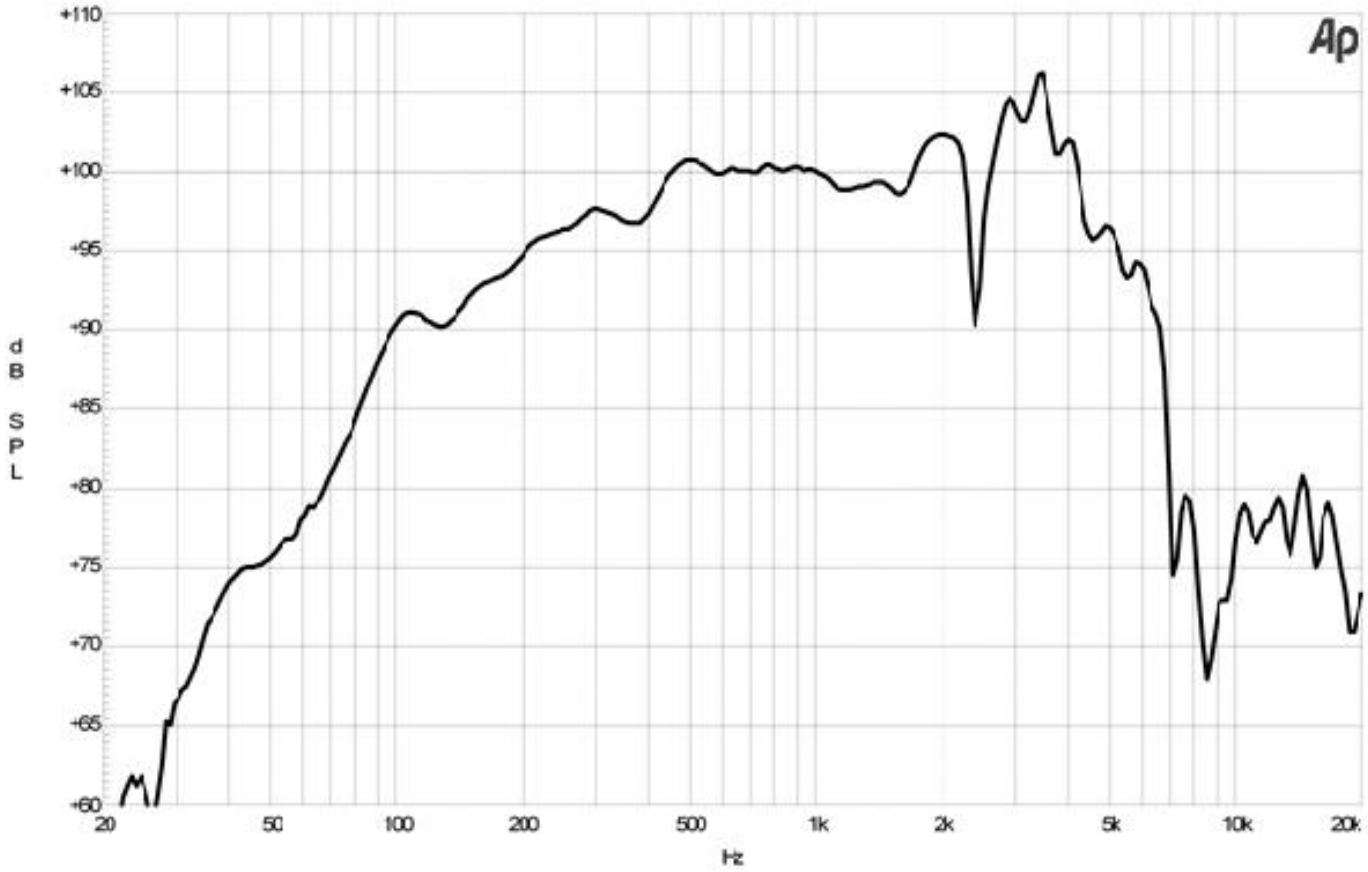


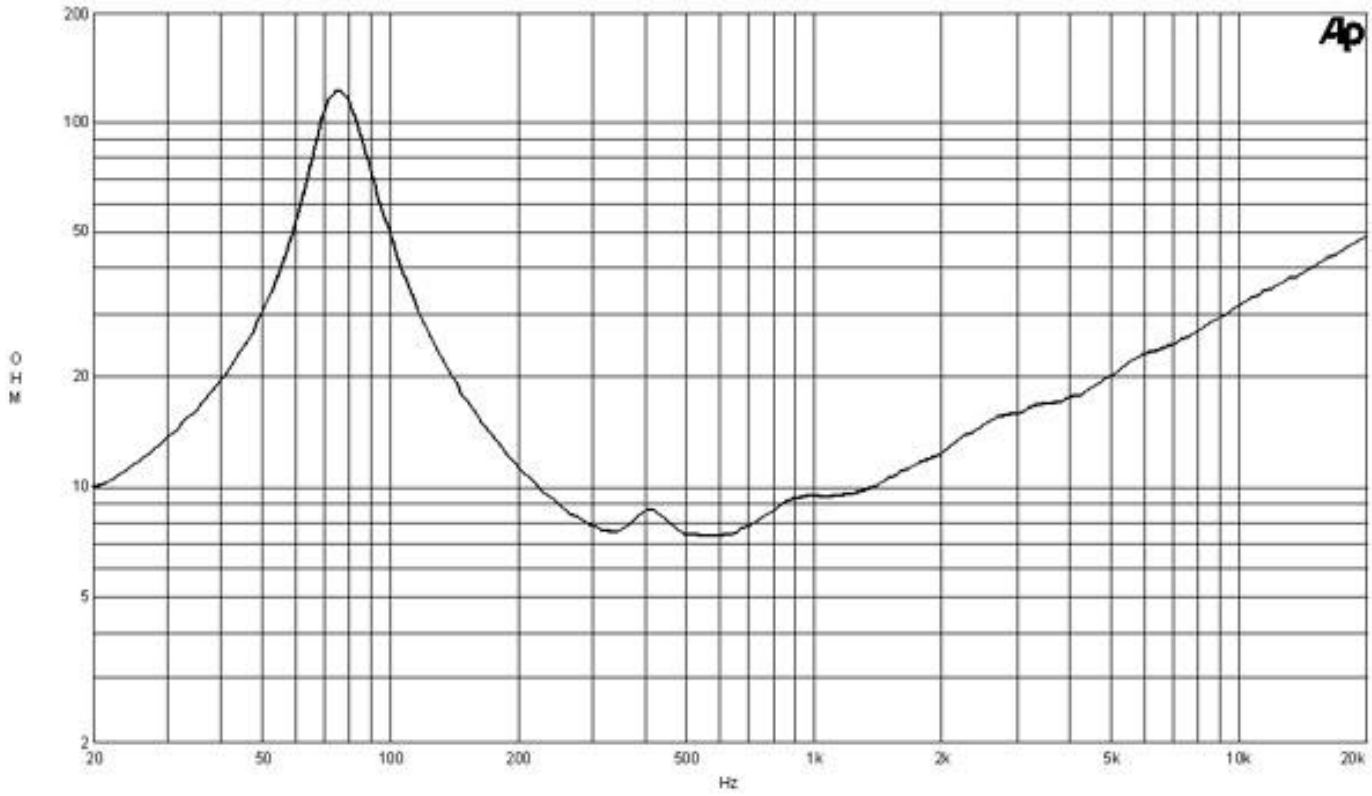


B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

10MD26 8 Ω

Mid-Bass

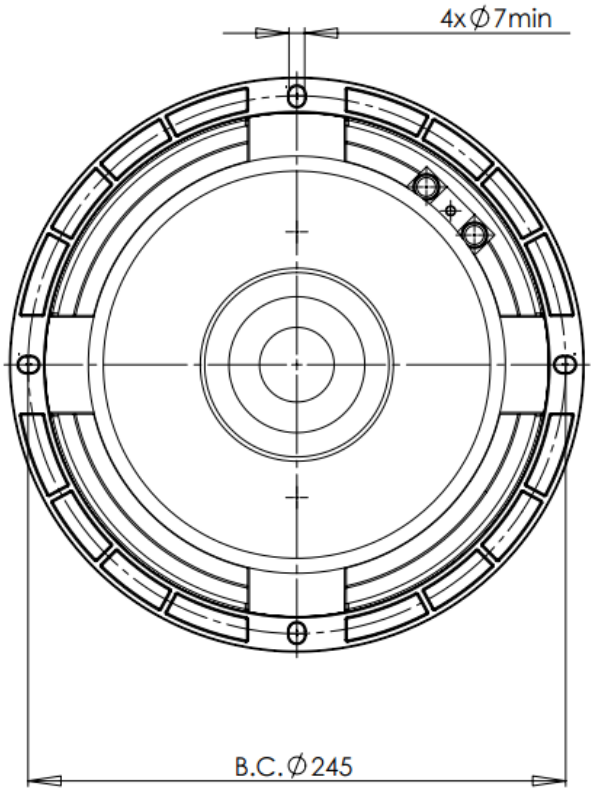

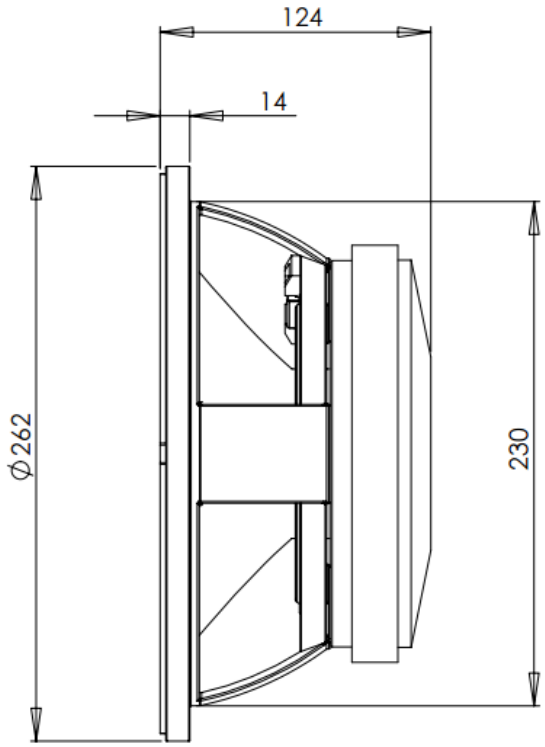

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com