
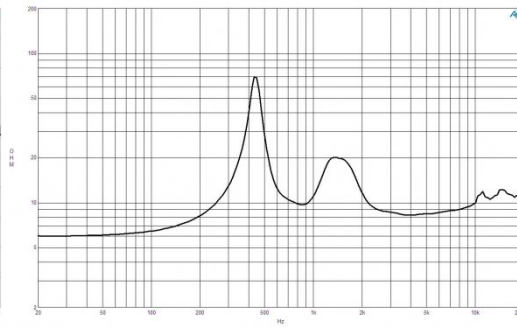


- 160 W continuous program power capacity
- 1.3" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Composite Polyester/Titanium diaphragm
- 500-18000 Hz response
- 109.5 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

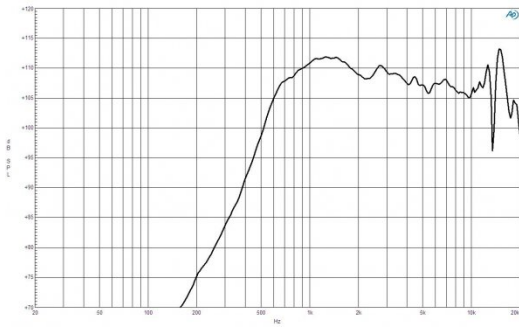

**SPECIFICATIONS**

Driver mounted on B&C ME90 horn.

Throat Diameter	33 mm (1.3 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.3 Ω
Nominal Power Handling	80 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	160 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	109.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	2.05 T
Diaphragm Material	Titanium

**MOUNTING AND SHIPPING INFO**

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	131 mm (5.15 in)
Depth	52 mm (2 in)
Net Weight	2.4 kg (5.29 lb)
Shipping Units	1 pcs
Shipping Weight	2.45 kg (5.4 lb)
Shipping Box	140x135x62 mm (5.51x5.31x2.44 in)

**SERVICE KITS**

HF replacement-diaphragm	MMD3B8M
--------------------------	---------