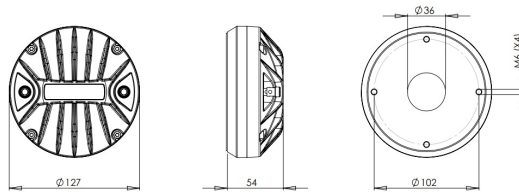


# DE1090TN



**8Ω****HF Drivers** - 1.4 Inches

- 240 W continuous program power capacity
- 1.4" horn throat diameter
- 100 mm (4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 20000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE1090TN is the latest version of our premium 100mm (4.0 in) voice coil, neodymium high frequency driver. The compact 127mm diameter was achieved using a specially designed inside ring neodymium magnet. The diaphragm used in DE1090TN has been completely redesigned to incorporate a bent edge voice coil former, as well as new dome and surround geometry. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.

# DE1090TN

## HF Drivers- 1.4 Inches

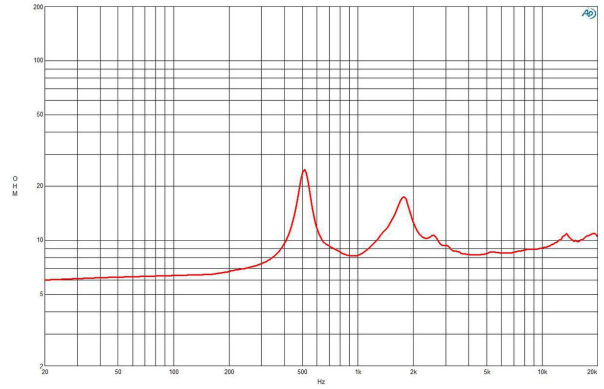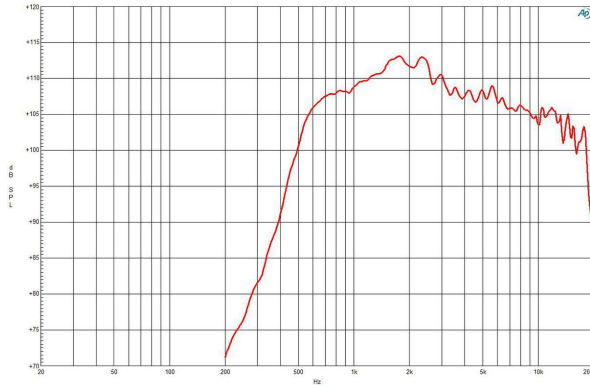

### SPECIFICATIONS<sup>1</sup>

|  |                 |
|--|-----------------|
| Throat Diameter                        | 36 mm (1.4 in)  |
| Nominal Impedance                      | 8 Ω             |
| Minimum Impedance                      | 8.3 Ω           |
| Nominal Power Handling <sup>2</sup>    | 120 W           |
| Continuous Power Handling <sup>3</sup> | 240 W           |
| Sensitivity (1W/1m) <sup>4</sup>       | 108.0 dB        |
| Frequency Range                        | 0.5 - 20.0 kHz  |
| Recommended Crossover <sup>5</sup>     | 0.8 kHz         |
| Voice Coil Diameter                    | 100 mm (4.0 in) |
| Winding Material                       | Aluminium       |
| Inductance                             | 0.18 mH         |
| Diaphragm Material                     | Titanium        |
| Flux Density                           | 1.9 T           |
| Magnet Material                        | Neo Inside Ring |

### MOUNTING AND SHIPPING INFO

|   |  |
|---|--|
| Four M6 holes 90° on 102 mm (4 in) diameter |  |
| Overall Diameter                            | 127 mm (5.0 in)                                      |
| Depth                                       | 54 mm (2.13 in)                                      |
| Net Weight                                  | 1.9 kg (4.19 lb)                                     |
| Shipping Units                              | 1  |
| Shipping Weight                             | 1.95 kg (4.29 lb)                                    |
| Shipping Box                                | 140x135x62 mm (5.51x5.31x2.44 in)                    |
| Other Details                               | 4x M6 Mounting Studs with bolts and washers included |

### SERVICE KIT

|                       |           |
|-----------------------|-----------|
| Replacement diaphragm | MMD4CTN8M |
|-----------------------|-----------|

1. Driver mounted on B&C ME90 horn
2. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. 12 dB/oct. or higher slope high-pass filter.