

15CL76 8 Ω

Woofer

- 800 W continuous program power capacity
- 76 mm (3 in) copper voice coil
- 40 - 3000 Hz response
- 98.5 dB sensitivity
- Ventilated voice coil gap for reduced power compression



15CL76 8 Ω

Woofer

SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.3 Ω
Nominal Power Handling	400 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	800 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	98.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	40 Hz - 3000 Hz
Voice Coil Diameter	76 mm (3 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	19 mm (0.75 in)
Magnetic Gap Depth	11 mm (0.43 in)
Flux Density	1.15 T
Woofer Cone Treatment	WP Waterproof Front Side

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	42 Hz
Re	5.1 Ω
Qes	0.34
Qms	7.9
Qts	0.33
Vas	135 dm³ (4.8 ft³)
Sd	855 cm² (132.5 in²)
η0	2.9 %
Xmax	7 mm
Xvar	8.5 mm
Mms	108 g
Bl	21 Tm
Le	1.3 mH
EBP	124 Hz

DESIGN



Surround Shape	Triple Roll
Cone Shape	Exponential
Magnet Material	Neodymium Inside Slug
Spider	Single
Pole Design	Straight Pole
Woofer Cone Treatment	WP Waterproof Front Side
Recommended Enclosure	100 dm³ (3.53 ft³)
Recommended Tuning	47 Hz
Recommended Loading	Vented Box

MOUNTING AND SHIPPING INFO

Overall Diameter	389 mm (15.31 in)
Bolt Circle Diameter	374 mm (14.72 in)
Baffle Cutout Diameter	353 mm (13.9 in)
Depth	171 mm (6.73 in)
Flange and Gasket Thickness	11 mm (0.43 in)
Air Volume Occupied by Driver	4.4 dm³ (0.15 ft³)
Net Weight	3.8 kg (8.38 lb)
Shipping Units	1 pcs
Shipping Weight	5.1 kg (11.24 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)

SERVICE KITS

LF recone-kits	RCK15CL768
----------------	-------------------

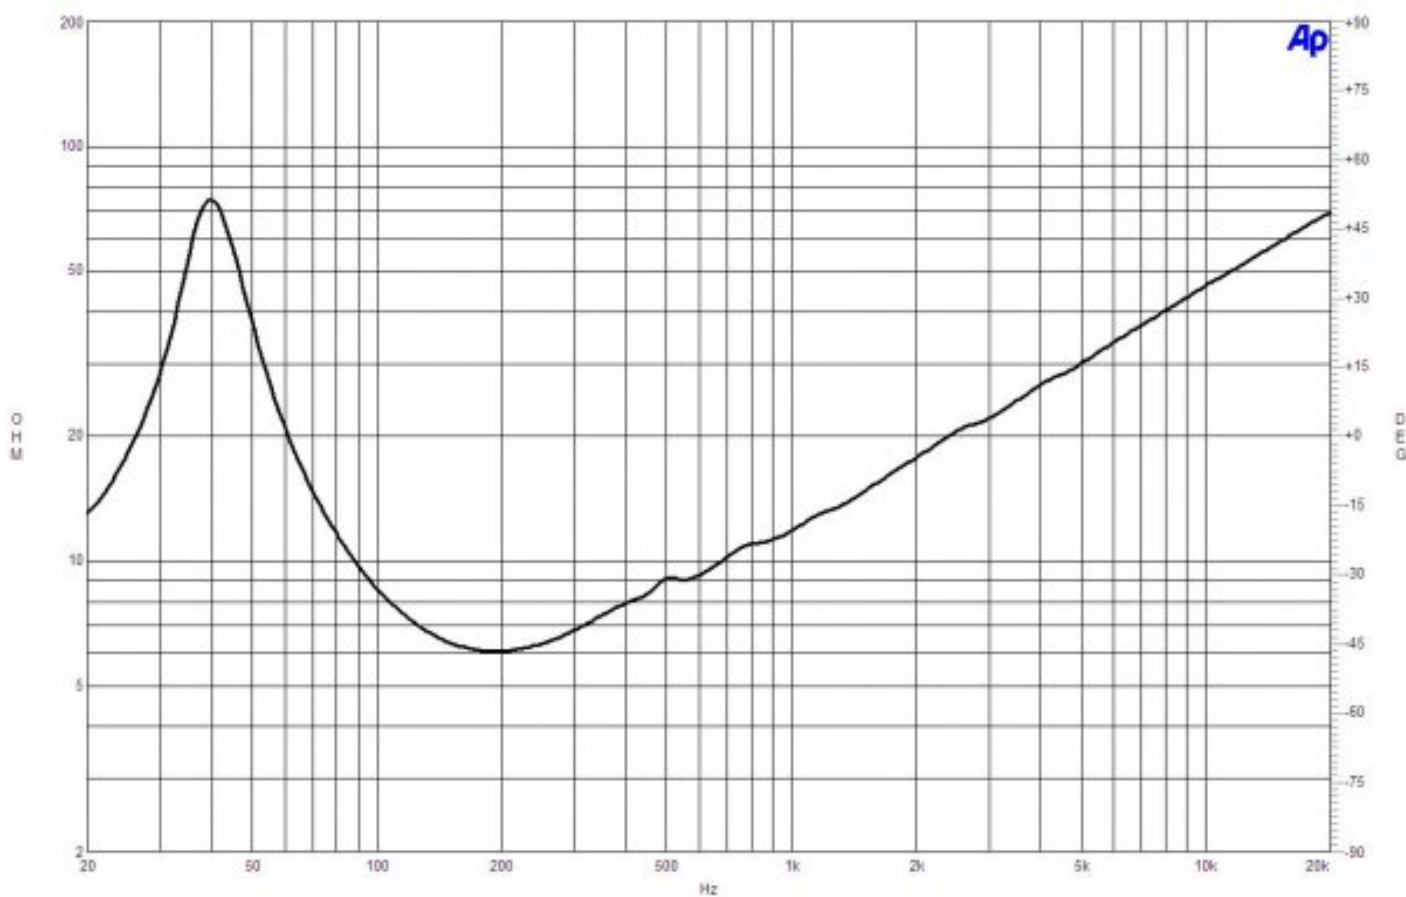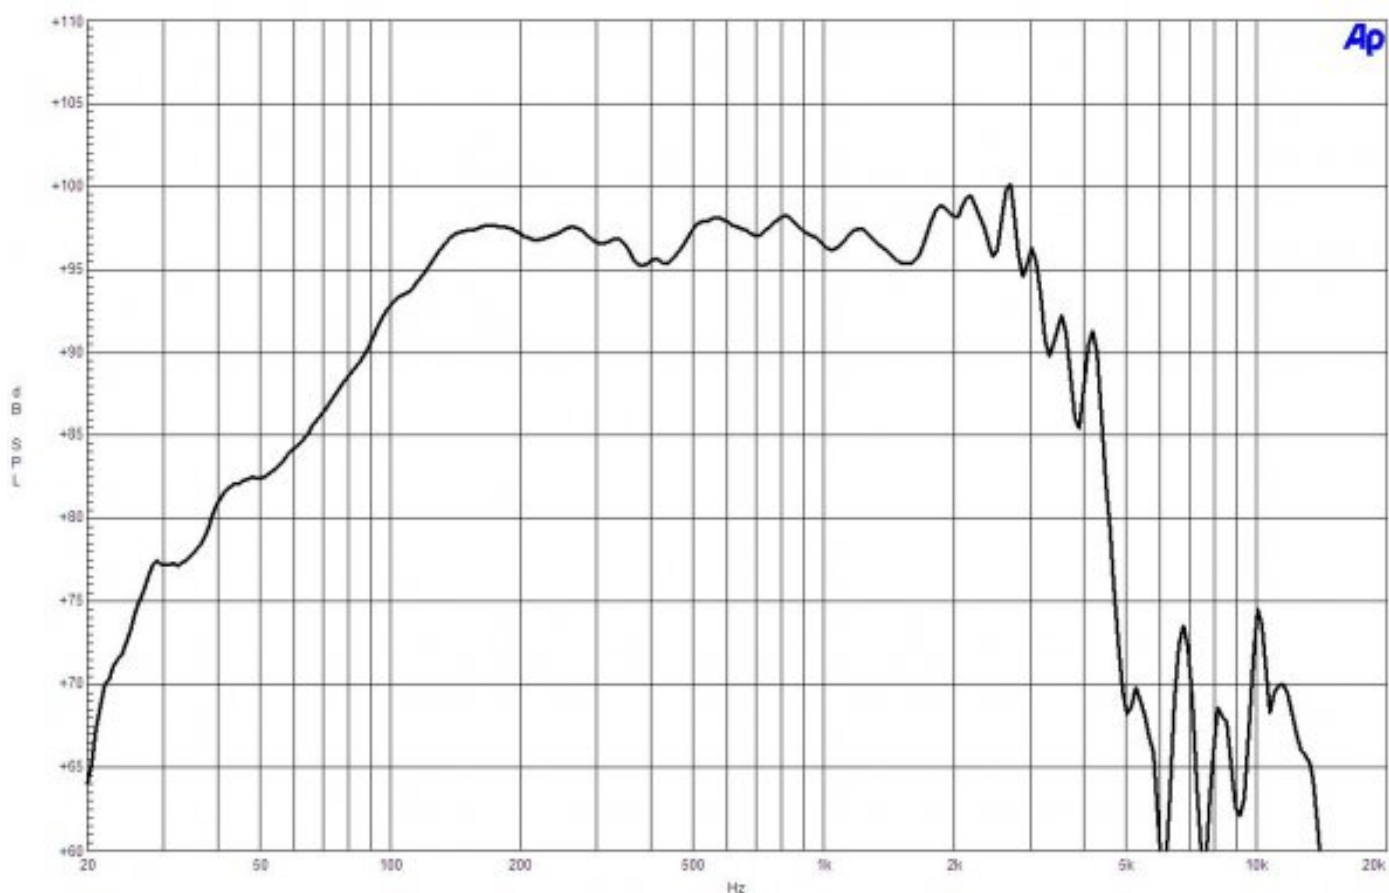

15CL76 8 Ω

Woofer

15CL76 8 Ω

Woofer

