


- 50 W continuous program power capacity
- Ultra Compact 60mm diameter
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- HT Polymer diaphragm
- 2000 - 18000 Hz response
- 107 dB sensitivity

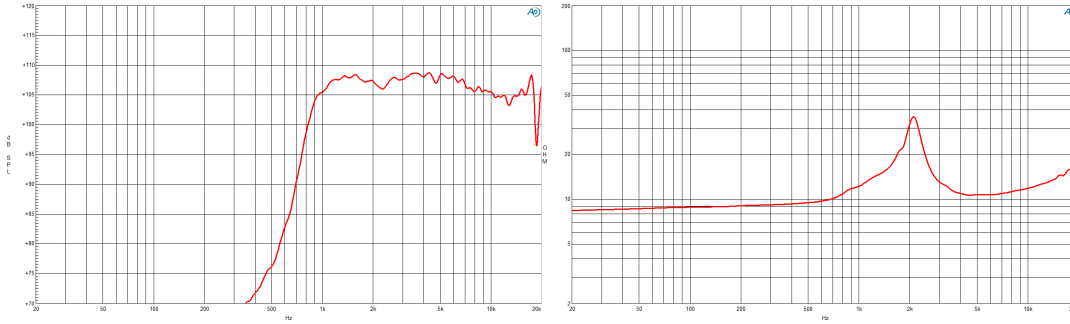

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

| | |
|---------------------------|--|
| Throat Diameter | 25 mm (1 in) |
| Nominal Impedance | 16 Ω |
| Minimum Impedance | 10.9 Ω |
| Nominal Power Handling | 25 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. |
| Continuous Power Handling | 50 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating. |
| Sensitivity | 107 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance. |
| Frequency Range | 2 kHz - 18 kHz |
| Recommended Crossover | 2 kHz 12 dB/oct. or higher slope high-pass filter. |
| Voice Coil Diameter | 36 mm (1.4 in) |
| Winding Material | Aluminium |
| Inductance | 0.14 mH |
| Flux Density | 1.8 T |
| Diaphragm Material | HT Polymer |

MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 52 mm (2.05 in) diameter

| | |
|------------------|--------------------------------------|
| Overall Diameter | 60 mm (2.36 in) |
| Depth | 35 mm (1.38 in) |
| Net Weight | 0.32 kg (0.71 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 0.35 kg (0.76 lb) |
| Shipping Box | 105x105x65 mm (4.13x4.13x2.56 in) |

SERVICE KITS

| | |
|--------------------------|-----------|
| HF replacement-diaphragm | MMDE11016 |
|--------------------------|-----------|