
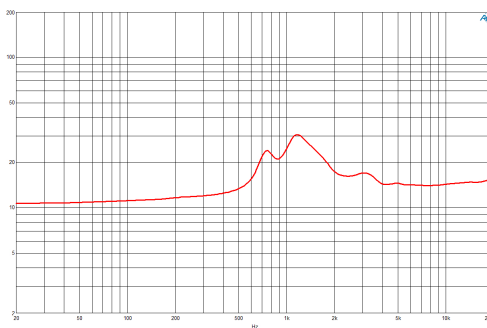


- 140 W continuous program power capacity
- 1" horn throat diameter
- 51 mm (2 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 17000 Hz response
- 108 dB sensitivity

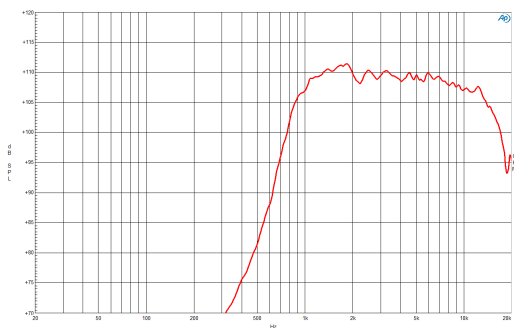

SPECIFICATIONS

Driver mounted on B&C ME45 horn

| | |
|---------------------------|--|
| Throat Diameter | 25 mm (1 in) |
| Nominal Impedance | 16 Ω |
| Minimum Impedance | 13.5 Ω |
| Nominal Power Handling | 70 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. |
| Continuous Power Handling | 140 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating. |
| Sensitivity | 109 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance. |
| Frequency Range | 1 kHz - 17 kHz |
| Recommended Crossover | 1.2 kHz 12 dB/oct. or higher slope high-pass filter. |
| Voice Coil Diameter | 51 mm (2 in) |
| Winding Material | Aluminium |
| Inductance | 0.14 mH |
| Flux Density | 2 T |
| Diaphragm Material | Titanium |

SERVICE KITS

| | |
|--------------------------|------------|
| HF replacement-diaphragm | MMD550TN16 |
|--------------------------|------------|

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter

| | |
|------------------|--------------------------------------|
| Overall Diameter | 92 mm (3.62 in) |
| Depth | 49 mm (1.93 in) |
| Net Weight | 1.17 kg (2.58 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 1.2 kg (2.65 lb) |
| Shipping Box | 105x105x65 mm (4.13x4.13x2.56 in) |