
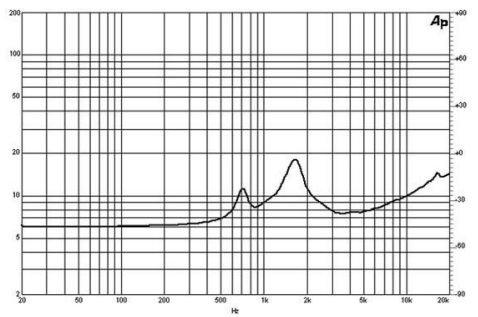


- 80 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Mylar diaphragm
- 1500 - 18000 Hz response
- 107 dB sensitivity

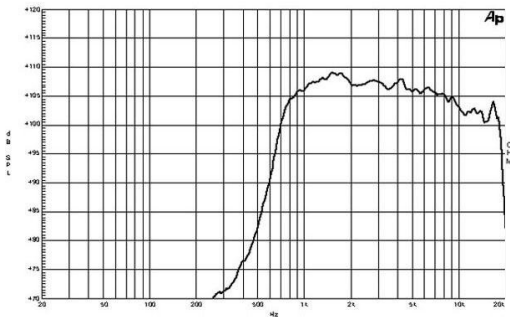

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.4 Ω
Nominal Power Handling	40 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	80 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	107 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	1.5 kHz - 18 kHz
Recommended Crossover	2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Flux Density	1.5 T
Diaphragm Material	Mylar

SERVICE KITS

HF replacement-diaphragm	MMDE1608
--------------------------	----------

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter

Overall Diameter	102 mm (4 in)
Depth	61 mm (2.4 in)
Net Weight	1.7 kg (3.75 lb)
Shipping Units	1 pcs
Shipping Weight	1.73 kg (3.81 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)