
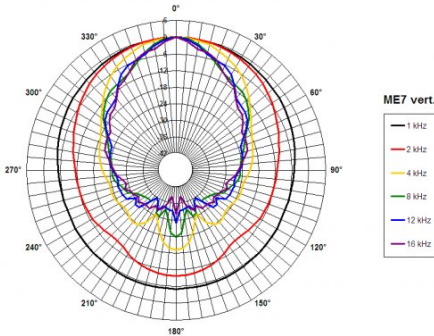
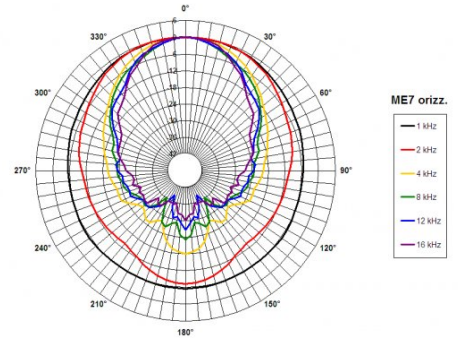
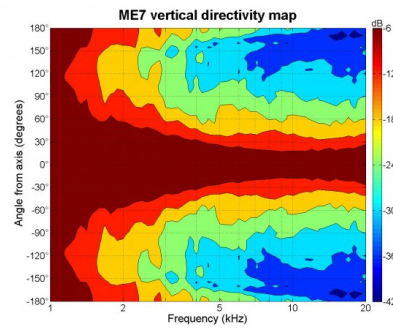


- Exponential flare with great directivity control
- 60° x 40° nominal coverage
- 3/4" throat entry
- Excellent loading down to 2 kHz

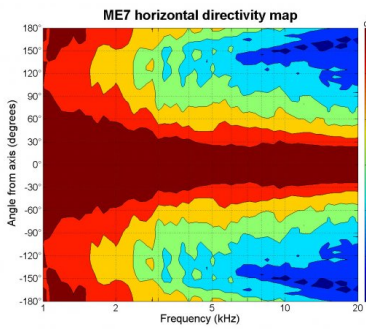

SPECIFICATIONS

Horn mounted on B&C DE 7 compression driver.

Throat Diameter	19 mm (0.75 in)
-----------------	-----------------

Nominal Coverage Horizontal	60 °
-----------------------------	------

Nominal Coverage Vertical	40 °
---------------------------	------

Cutoff Frequency	2 kHz
------------------	-------

Material	ABS
----------	-----

Dimensions	122x122x102 mm (4.8x4.8x4 in)
------------	----------------------------------

MOUNTING AND SHIPPING INFO

Other details	2x 4.1 mm (0.16 in) holes 180° on 53 mm (2.1 in) diameter
---------------	--

Baffle Cutout Dimension	102.7 mm (4 in)
-------------------------	-----------------

Air Volume Occupied by Driver	0.1 dm ³
-------------------------------	---------------------

Net Weight	0.11 kg (0.25 lb)
------------	-------------------

Shipping Units	1 pcs
----------------	-------

Shipping Weight	0.23 kg (0.51 lb)
-----------------	-------------------

Shipping Box	120x117x110 mm (4.72x4.61x4.33 in)
--------------	---------------------------------------