6PS38 8 Ω

Woofer

- 300W continuous power capacity
- 38 mm (1.5 in) aluminium voice coil
- 75 - 5000 Hz frequency response
- 94 dB sensitivity





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

6PS38 8 Ω

Woofer

SPECIFICATIONS

Nominal Diameter	**170 mm (6.5 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**6.6 Ω**
Nominal Power Handling 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	**150 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**300 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**94 dB**
Frequency Range	**75 Hz - 5000 Hz**
Voice Coil Diameter	**38 mm (1.5 in)**
Winding Material	**Aluminium**
Former Material	**Glass Fibre**
Winding Depth	**12 mm (0.49 in)**
Magnetic Gap Depth	**6 mm (0.24 in)**
Flux Density	**1.4 T**
Woofer Cone Treatment	**WP Waterproof Front Side**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**75 Hz**
Re	**5.4 Ω**
Qes	**0.31**
Qms	**11.7**
Qts	**0.3**
Vas	**8 dm^3 (0.28 ft^3)**
Sd	**132 cm^2 (20.46 in^2)**
η0	**1 %**
Xmax	**6 mm**
Xvar	**7.5 mm**
Mms	**14 g**
Bl	**10.8 Tm**
Le	**0.6 mH**
EBP	**242 Hz**

DESIGN

Surround Shape	**Roll**
Cone Shape	**Radial**
Magnet Material	**Ferrite**
Spider	**Single**
Pole Design	**Straight Pole**
Woofer Cone Treatment	**WP Waterproof Front Side**
Recommended Enclosure	**9 dm^3 (0.32 ft^3)**
Recommended Tuning	**80 Hz**

MOUNTING AND SHIPPING INFO

Overall Diameter	**187 mm (7.36 in)**
Bolt Circle Diameter	**172 mm (6.77 in)**
Baffle Cutout Diameter	**145 mm (5.71 in)**
Depth	**82 mm (3.23 in)**
Flange and Gasket Thickness	**9 mm (0.35 in)**
Air Volume Occupied by Driver	**0.8 dm^3 (0.03 ft^3)**
Net Weight	**2.35 kg (5.18 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**2.55 kg (5.62 lb)**
Shipping Box	**210x210x125 mm (8.27x8.27x4.92 in)**


SERVICE KITS


LF recone-kits	**RCK06PS388**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

6PS38 8 Ω

Woofer

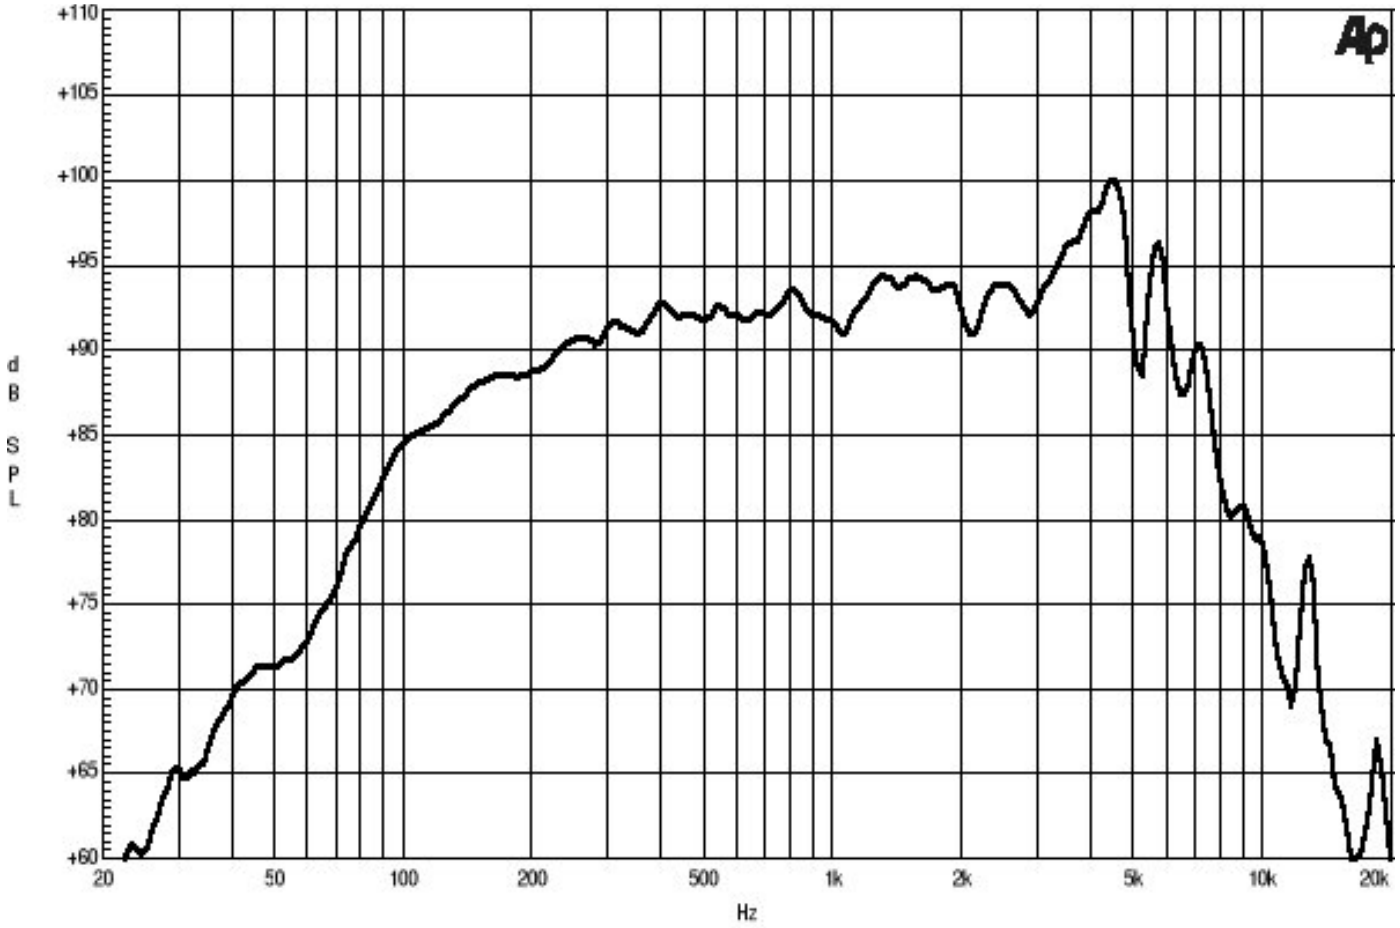


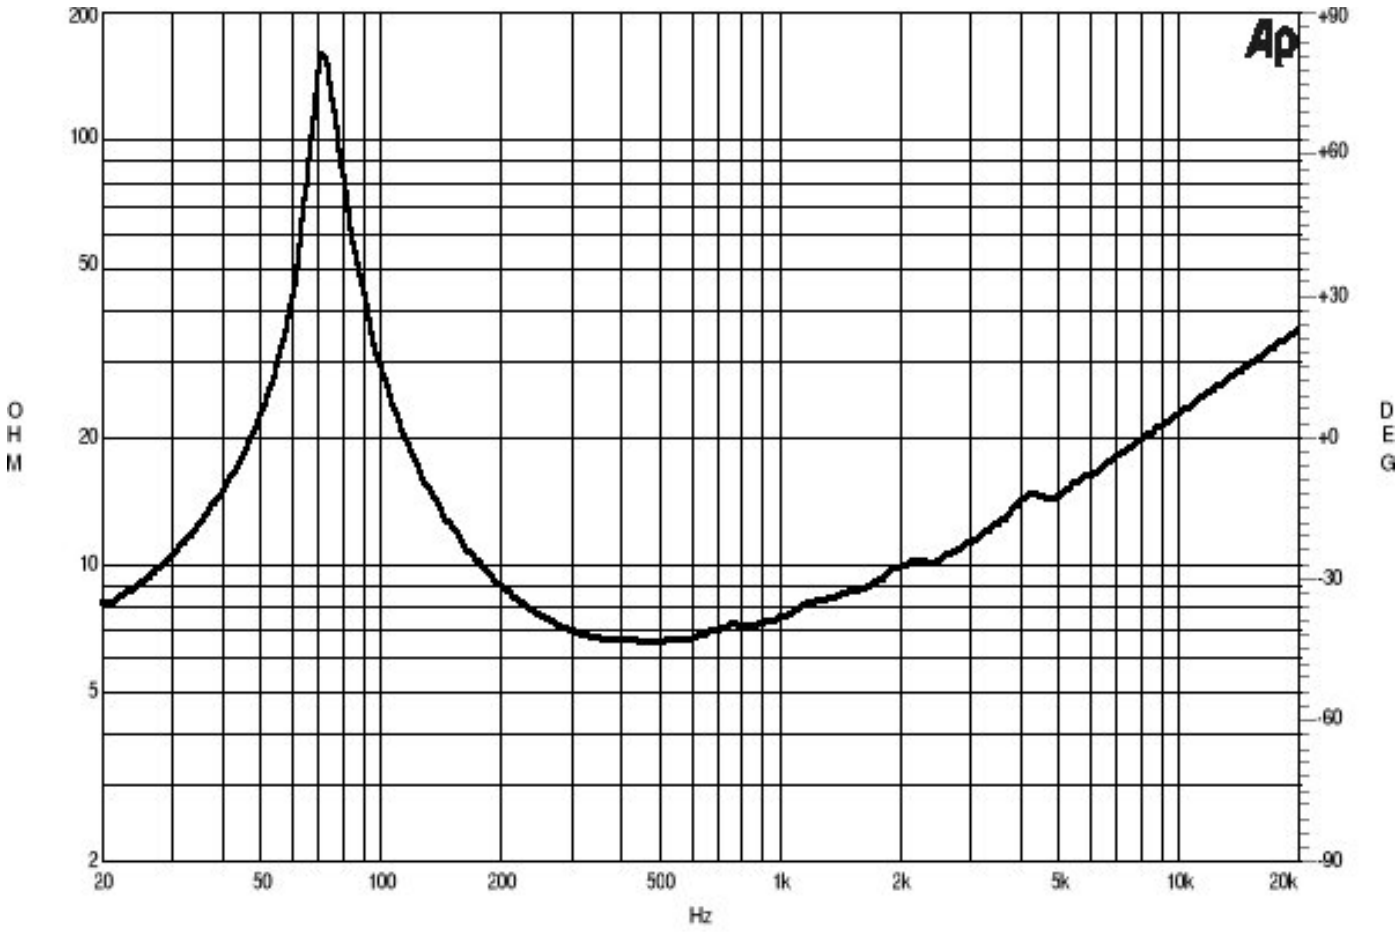


B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

6PS38 8 Ω

Woofer

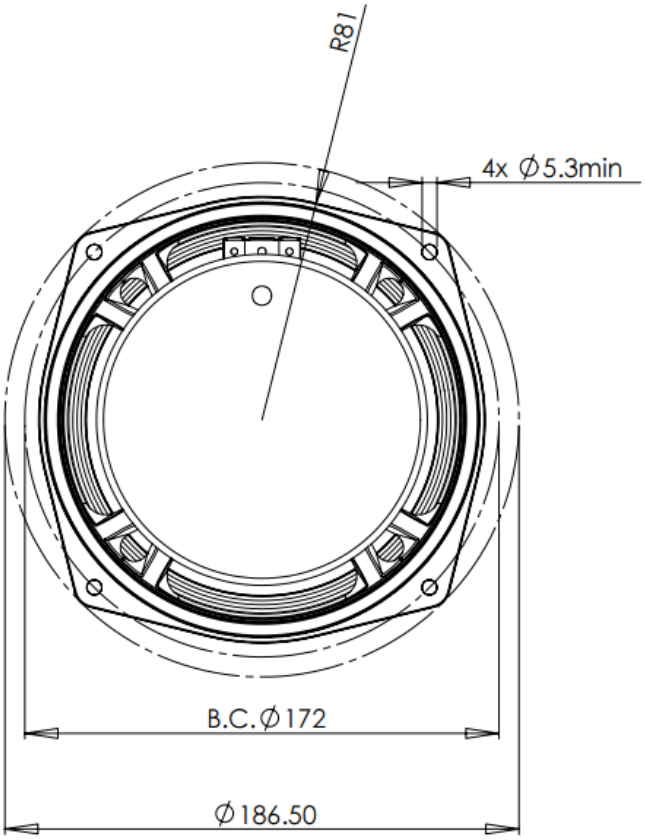

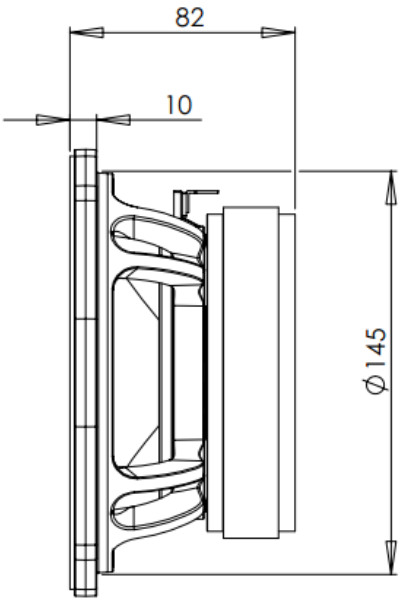

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com