
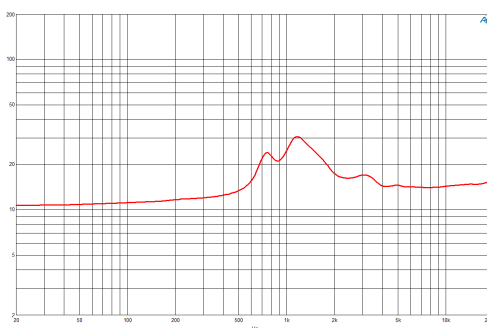


- 140 W continuous program power capacity
- 1" horn throat diameter
- 51 mm (2 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 17000 Hz response
- 108 dB sensitivity

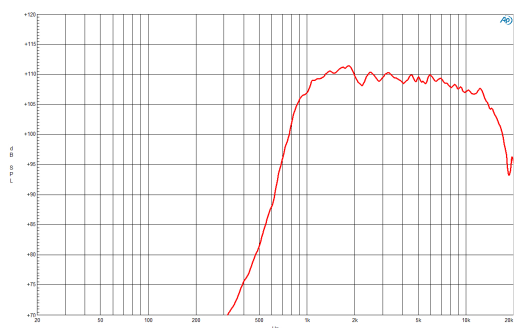

**SPECIFICATIONS**

Driver mounted on B&amp;C ME45 horn

Throat Diameter	25 mm (1 in)
Nominal Impedance	16 $\Omega$
Minimum Impedance	13.5 $\Omega$
Nominal Power Handling	70 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	140 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	109 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.
Frequency Range	1 kHz - 17 kHz
Recommended Crossover	1.2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	51 mm (2 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	2 T
Diaphragm Material	Titanium
Min Frequency Range	1 Hz
Max Frequency Range	17 Hz

**MOUNTING AND SHIPPING INFO**

Two M6 holes 180° on 76 mm (3 in) diameter

Overall Diameter	92 mm (3.62 in)
Depth	49 mm (1.93 in)
Net Weight	1.17 kg (2.58 lb)
Shipping Units	1 pcs
Shipping Weight	1.2 kg (2.65 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)