

50 W continuous program power capacity



1" horn throat diameter

36 mm (1.4 in) aluminium voice coil

Polyester diaphragm

1500 - 18000 Hz response

106 dB sensitivity

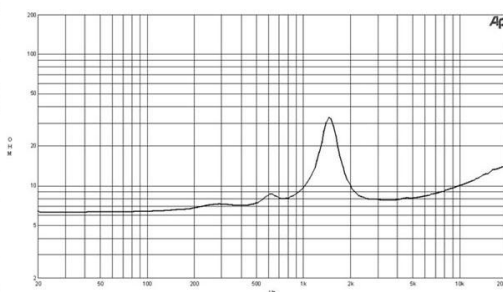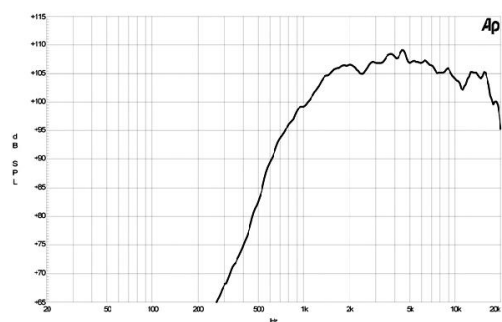

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	25 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	50 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	106 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	1.5 kHz - 18 kHz
Recommended Crossover	2.2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.45 T
Diaphragm Material	Mylar
Min Frequency Range	1.5 kHz
Max Frequency Range	18 kHz

MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 76 mm (3 in) diameter

Overall Diameter	90 mm (3.5 in)
Depth	49 mm (2 in)
Net Weight	1.05 kg (2.31 lb)
Shipping Units	1 pcs
Shipping Weight	1.08 kg (2.38 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD0128
--------------------------	---------