

DE1085TN



8Ω**HF Drivers** - 2.0 Inches

- 280 W continuous program power capacity
- 2" horn throat diameter
- 100 mm (4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 20000 Hz response
- 109 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE1085TN is the latest version of our premium 100mm (4.0 in) voice coil, neodymium high frequency driver. The diaphragm in this model has been completely redesigned to incorporate a bent edge voice coil former as well as new dome and surround geometry. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.

DE1085TN

HF Drivers- 2.0 Inches

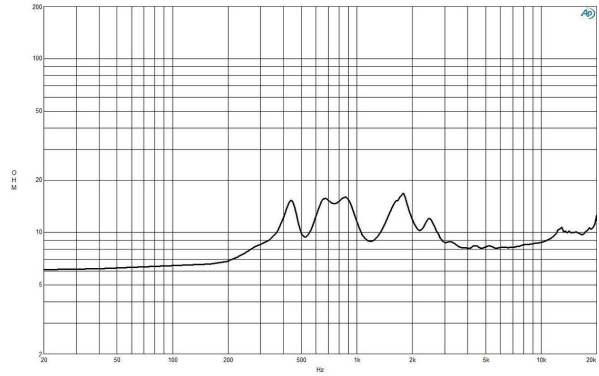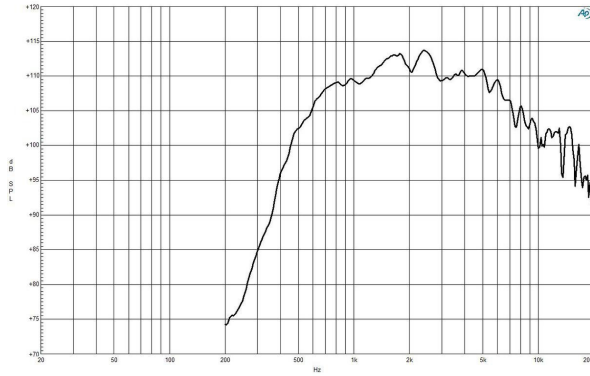

SPECIFICATIONS¹

| | |
|--|------------------|
| Throat Diameter | 50 mm (2.0 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 8.0 Ω |
| Nominal Power Handling ² | 140 W |
| Continuous Power Handling ³ | 280 W |
| Sensitivity ⁴ | 109.0 dB |
| Frequency Range | 500.0 - 20.0 kHz |
| Recommended Crossover ⁵ | 0.8 kHz |
| Voice Coil Diameter | 100 mm (4.0 in) |
| Winding Material | Aluminium |
| Inductance | 0.18 mH |
| Diaphragm Material | Titanium |
| Flux Density | 1.95 T |
| Magnet Material | Neodymium Ring |

MOUNTING AND SHIPPING INFO

| | |
|---|--|
| Four M6 holes 90° on 102 mm (4 in) diameter | |
| Overall Diameter | 154 mm (6.1 in) |
| Depth | 86 mm (3.39 in) |
| Net Weight | 3.6 kg (7.9 lb) |
| Shipping Units | 1 |
| Shipping Weight | 3.9 kg (8.6 lb) |
| Shipping Box | 190x190x120 mm (7.48x7.48x4.72 in) |
| Other Details | 4x M6 Mounting Studs with bolts and washers included |

SERVICE KIT

| | |
|-----------------------|-----------|
| Replacement diaphragm | MMD4BTN8M |
|-----------------------|-----------|

1. Driver mounted on B&C ME 60 horn.
2. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. 12 dB/oct. or higher slope high-pass filter.