


- 20 W continuous program power capacity
- 25 mm (1 in) aluminium voice coil
- 1/2" horn throat diameter
- Mylar diaphragm
- 1500 - 18000 Hz response
- 109 dB sensitivity

Available exclusively with 4.8+2.8 mm fast-on terminal tab

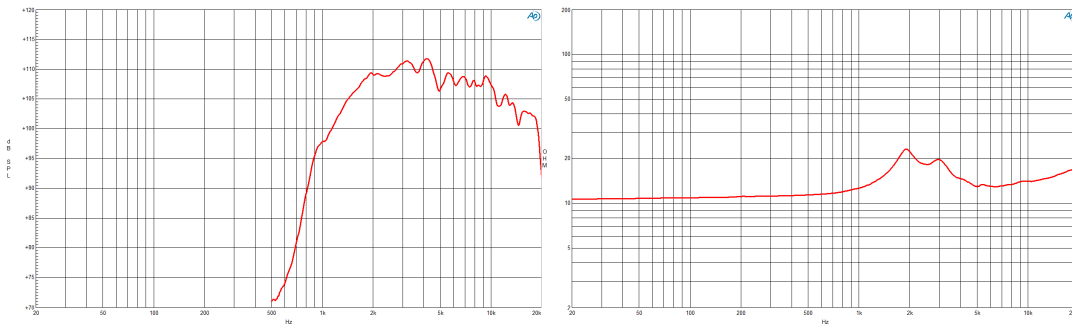

## SPECIFICATIONS

Driver mounted on B&C ME 45 horn + 1/2" adaptor

Throat Diameter	13 mm (0.5 in)
Nominal Impedance	16 $\Omega$
Minimum Impedance	13 $\Omega$
Nominal Power Handling	10 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	20 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	109 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.
Frequency Range	2 kHz - 18 kHz
Recommended Crossover	2.5 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	25 mm (1 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.65 T
Diaphragm Material	Mylar

## SERVICE KITS

HF replacement-diaphragm	MMDE516
--------------------------	---------

## MOUNTING AND SHIPPING INFO

Two M4 holes 180° on 53 mm (2.1 in) diameter

Overall Diameter	62 mm (2.44 in)
Depth	34 mm (1.33 in)
Net Weight	0.17 kg (0.37 lb)
Shipping Units	1 pcs
Shipping Weight	0.18 kg (0.4 lb)
Shipping Box	65x55x40 mm (2.56x2.17x1.57 in)